

TIGER EVH LED

Architectural Indoor



| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |


FEATURES

- Steel Fascia with Matte Silver Powder Coat Finish
- Aluminum Mounting Plate Mounts to Flat Surface
- Centered Over and Mounted to 4" J-Box (By Others)
- Luminous White Acrylic Diffuser
- Open Top and Bottom
- Dimmable to 10%
- ADA Compliant
- CSA Listed Dry Location For Wall Mount
- Mounting Hardware Included





LINE DRAWING

LINE DRAWING NOT TO SCALE

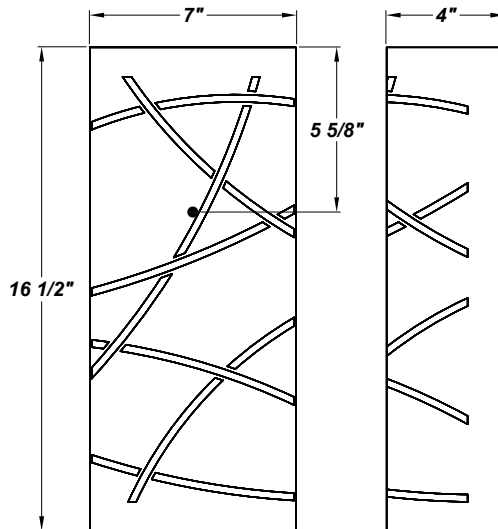

FINISHES

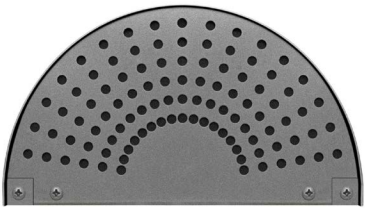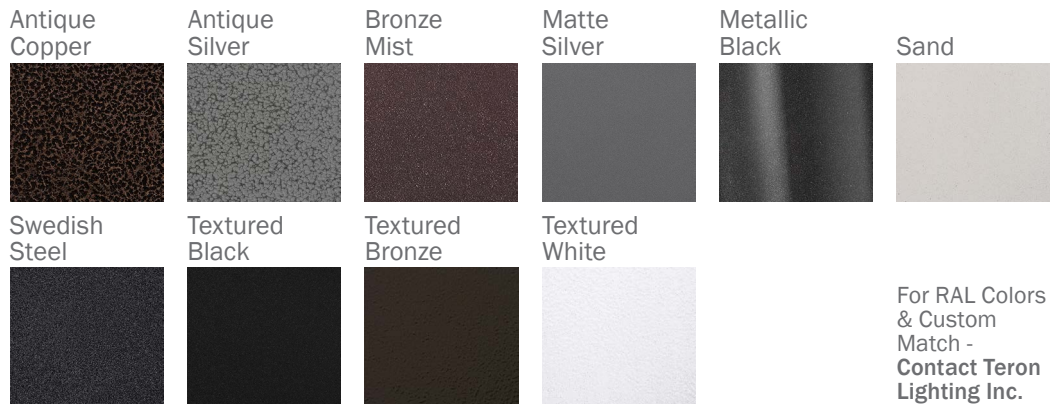

TIGER EVH LED

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|----------------|
| TGR - Tiger | L12.0-LT350 - 12.0W LED Strips @ 350mA 2-Wire Trailing or Leading Edge Driver L18.0-LT500 - 18.0W LED Strips @ 500mA 2-Wire Trailing or Leading Edge Driver | 100-277V (120-230V Dimmable For Most LT LED Drivers) (ZE 0-10V Drivers Are Dimmable From 120V - 277V) | Not Applicable |
| ORDER INFO | | | |
| TGR Example ^ | L12.0-LT350 | 100-277V | Not Applicable |

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| EVH | AC - Antique Copper AS - Antique Silver BT - Bronze Mist MB - Metallic Black SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp | EB - Emergency Integral Driver F - Fused TBC - Perforated Steel Top & Bottom Covers TCV - Perforated Steel Top Cover |
| ORDER INFO | | | |
| EVH Example ^ | AC | 30K | EB |

| PROD | SOURCE | 30K SPECS | | | | |
|------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
| TGR | L12.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 1400 LED Source Lumens 116.7 LED Source Lumens Per Watt | | | | |
| | L18.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 1986 LED Source Lumens 110.3 LED Source Lumens Per Watt | | | | |

| REPLACEMENT PART | PART NO | NOTES |
|--------------------|---------|-------|
| White Acrylic Lens | 3040960 | |

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

TIGER EVH LED

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|------------------|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|-----------------------|
| TGR - Tiger | L18.0-ZE500 - 18.0W LED Strips @ 500mA Low Voltage 4-Wire Dimming Electronic Driver | 100-277V (120-230V Dimmable For Most LT LED Drivers) (ZE 0-10V Drivers Are Dimmable From 120V - 277V) | Not Applicable |
| ORDER INFO | | | |
| TGR Example ^ | L18.0-ZE500 | 100-277V | Not Applicable |

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| EVH | AC - Antique Copper AS - Antique Silver BT - Bronze Mist MB - Metallic Black SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp | EB - Emergency Integral Driver F - Fused TBC - Perforated Steel Top & Bottom Covers TCV - Perforated Steel Top Cover |
| ORDER INFO | | | |
| EVH Example ^ | AC | 30K | EB |

| PROD | SOURCE | 30K SPECS | | | | |
|------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
| TGR | L18.0 | <ul style="list-style-type: none"> • 30K - 3000K Color Temp • 1986 LED Source Lumens • 110.3 LED Source Lumens Per Watt | | | | |

| REPLACEMENT PART | PART NO | NOTES |
|--------------------|---------|-------|
| White Acrylic Lens | 3040960 | |

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.