

HERITAGE ROUND RNG LED

Architectural Outdoor



| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |


FEATURES

- Aluminum Reflector Plate w/ Hi-Reflectance White
- CSA Listed Wet Location For Wall or Ceiling Mount
- Die-Cast, Marine Grade Aluminum Housing
- EPMD Ribbed / Foam Rubber Gasketing
- Injection Molded Polycarbonate Fascia w/ Weep Holes
- Integral Emergency Driver Available - Wall Mount Only and (120-277V Only)
- Junction Box Pattern on Housing For Easy Mounting
- Powder Coat Finish
- Surge Protector
- Translucent White Injection Molded
- Thermal Compensation Technology For the L24.5 Ensures Longer LED Lifetime, Which is Ideal For Fixtures Being Placed in Area w/ Fluctuating or Higher Ambient Temperatures
- UV-Stabilizing Polycarbonate Diffuser
- 120V - 277V, (347V Only Available on L32.0)

LINE DRAWING

LINE DRAWING NOT TO SCALE

**0.75" CONDUIT ENTRIES
4 TOTAL - SPACED 90 DEGREES
AROUND SIDE OF HOUSING**

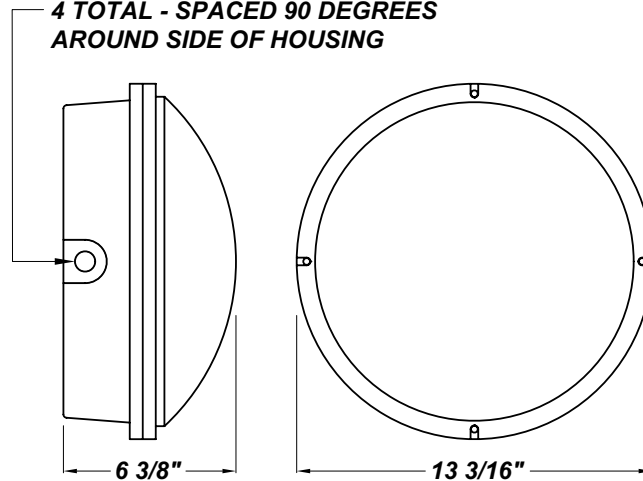

FINISHES

For RAL Colors
& Custom
Match -
Contact Teron
Lighting Inc.

HERITAGE ROUND RNG LED

Architectural Outdoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|----------------------|---|----------------------------------|-----------------------|
| HRT - Heritage Round | L18.4-12VDC - 18.4W @ 12V Direct Current Driver (6) 3.066W ThermAdjust LED Strips L20.5-ZE640 - (60) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) | 100 - 277V (50 / 60Hz) | Not Applicable |
| ORDER INFO | | | |
| HRT | L18.4-12VDC | 100 - 277V | Not Applicable |

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|------------|--|--|--|
| RNG | BK - Matte Black BZ - Matte Bronze WH - Matte White TI - Matte Titanium | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp | EB51 - 5.1W Emergency Driver F - Fused FRL - Frosted Ribbed Lens PCL120 - 120V Photocell PCL277 - 277V Photocell TP - Tamper Resistant Screws |
| ORDER INFO | | | |
| RNG | BK | 30K | EB51 |

Example ^ (may not represent a manufacturable product)

| PROD | SOURCE | 30K SPECS | | | | |
|------|--------|--|--|--|--|--|
| HRT | L18.4 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 1896 LED Source Lumens 103 LED Source Lumens Per Watt | | | | |
| | L20.5 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 3100 LED Source Lumens 151 LED Source Lumens Per Watt | | | | |

| REPLACEMENT PART | PART NO | NOTES |
|---------------------------------------|---------|-------------------------|
| White Ribbed Polycarbonate Diffuser | 3408360 | EB51 is wall mount only |
| Frosted Ribbed Polycarbonate Diffuser | 3408362 | |

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

HERITAGE ROUND RNG LED

Architectural Outdoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|----------------------|--|----------------------------------|-----------------------|
| HRT - Heritage Round | L24.5 - 24.5W @ 12V Direct Current Driver (8) 3.066W ThermAdjust LED Strips L30.0-ZE1000 - (60) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) | 100 - 277V (50 / 60Hz) | Not Applicable |
| ORDER INFO | | | |
| HRT | L24.5 | 100 - 277V | Not Applicable |

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|------------|--|--|--|
| RNG | BK - Matte Black BZ - Matte Bronze WH - Matte White TI - Matte Titanium | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp | EB51 - 5.1W Emergency Driver F - Fused FRL - Frosted Ribbed Lens PCL120 - 120V Photocell PCL277 - 277V Photocell TP - Tamper Resistant Screws |
| ORDER INFO | | | |
| RNG | BK | 30K | EB51 |

Example ^ (may not represent a manufacturable product)

| PROD | SOURCE | 30K SPECS | | | | |
|------|--------|--|--|--|--|--|
| HRT | L24.5 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 2528 LED Source Lumens 103.2 LED Source Lumens Per Watt | | | | |
| | L30.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 4522 LED Source Lumens 134 LED Source Lumens Per Watt | | | | |

| REPLACEMENT PART | PART NO | NOTES |
|---------------------------------------|---------|-------------------------|
| White Ribbed Polycarbonate Diffuser | 3408360 | EB51 is wall mount only |
| Frosted Ribbed Polycarbonate Diffuser | 3408362 | |

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

HERITAGE ROUND RNG LED

Architectural Outdoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|----------------------|---|-------------|----------------|
| HRT - Heritage Round | L32.0-ZE1050 - (80) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) | 347V (60Hz) | 0-10V Dimming |
| ORDER INFO | | | |
| HRT | L32.0 | 347V | Not Applicable |

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|------------|--|--|--|
| RNG | BK - Matte Black BZ - Matte Bronze WH - Matte White TI - Matte Titanium | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp | FRL- Frosted Ribbed Lens TP - Tamper Resistant Screws |
| ORDER INFO | | | |
| RNG | BK | 30K | FRL |

Example ^ (may not represent a manufacturable product)

| PROD | SOURCE | 30K SPECS | | | |
|------|--------|--|--|--|--|
| HRT | L32.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 5098 LED Source Lumens 159.3 LED Source Lumens Per Watt | | | |

| REPLACEMENT PART | PART NO | NOTES |
|---------------------------------------|---------|-------|
| White Ribbed Polycarbonate Diffuser | 3408360 | |
| Frosted Ribbed Polycarbonate Diffuser | 3408362 | |

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.