

# NICKLAUS LED 48"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




## FEATURES

- ADA Compliant
- Aluminum Reflector w/ Hi-Reflectance White Powder Coat Finish
- Constant Current
- CSA Listed Damp Location For Surface Mount
- Dimmable to 10% From 120V to 230V
- ELV Driver - Over-Voltage, Over-Current, and Short-Circuit Protection w/ Auto Recovery
- L70 life time for 50,000hr
- LED Light Fixture
- Luminous White Acrylic Diffuser w/ Black Marble Acrylic End Caps
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Steel Housing w/ White Powder Coat Finish

## LINE DRAWING

LINE DRAWING NOT TO SCALE

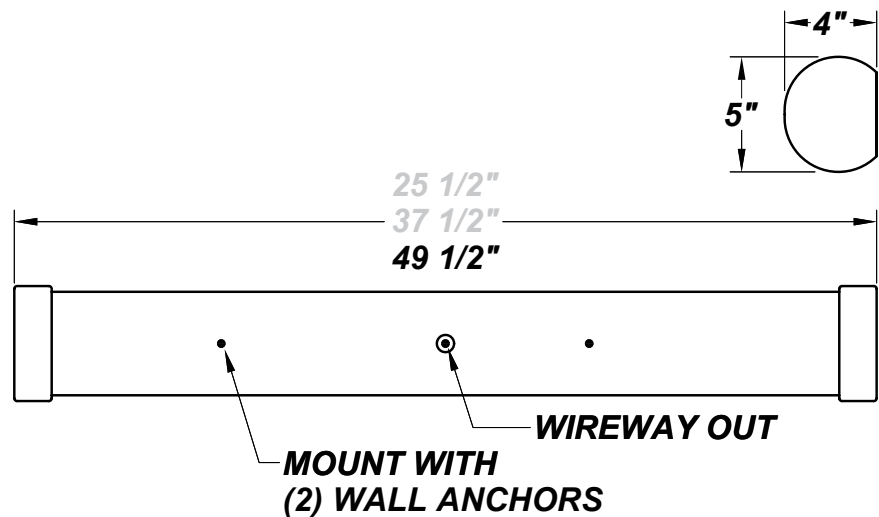

## FINISHES

For RAL Colors  
& Custom  
Match -  
Contact Teron  
Lighting Inc.

# NICKLAUS LED 48"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
<b>NS48</b> - Nicklaus 49 1/2"	<b>L24.0-TE350</b> - 24W LED Strip(s) @ 350mA ELV Dimming Driver <b>L36.0-TE500</b> - 36W LED Strip(s) @ 500mA ELV Dimming Driver <b>L36.0-ZE1000</b> - 36.0W LED Strip(s) @ 500mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	<b>120 - 277V</b>	<b>Not Applicable</b>
ORDER INFO			
NS48 Example ^	L24.0-TE350	120 - 277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
<b>Not Applicable</b>	<b>Optional End Cap Colors Available</b> - Consult Factory For Details and Pricing	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp	<b>F</b> - Fused
ORDER INFO			
Not Applicable Example ^		30K	F

PROD	SOURCE	30K SPECS			
<b>NS48</b>	L24.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>2800 LED Source Lumens</li> <li>100 LED Source Lumens Per Watt</li> </ul>			
	L36.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>3972 LED Source Lumens</li> <li>99 LED Source Lumens Per Watt</li> </ul>			

REPLACEMENT PART	PART NO	NOTES
48" White Acrylic w/ Black Marble LED Lens Assembly	3820451	Don't see the configuration you are looking for? Call us today at (513) 858-6004



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

# NICKLAUS LED 48"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NS48 - Nicklaus 49 1/2"	L41.2-ZE1200 - 41.2W LED Strip(s) @ 1200mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120 - 277V	Not Applicable
ORDER INFO			
NS48 Example ^	L41.2-ZE1200	120 - 277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	Optional End Cap Colors Available - Consult Factory For Details and Pricing	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp	F - Fused
ORDER INFO			
Not Applicable Example ^		30K	F

PROD	SOURCE	30K SPECS			
NS48	L41.2	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>5578 LED Source Lumens</li> <li>129.7 LED Source Lumens Per Watt</li> </ul>			

REPLACEMENT PART	PART NO	NOTES
48" White Acrylic w/ Black Marble LED Lens Assembly	3820451	Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.