


TRITON MINI LED

Architectural Outdoor



| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

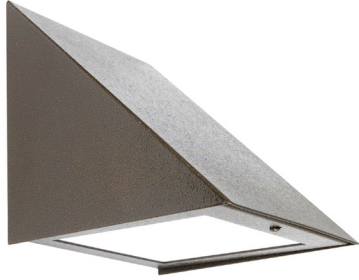


FEATURES


- Aluminum Housing w/ Textured Bronze Polyester Powder Coat Finish,
- Aluminum Mount Pan & Reflector w/ Hi-Reflectance White Powder Coat Finish
- Dark Sky Compliant
- Mounts Directly to Junction Box (Mounting Hardware Included)
- Surge Protector
- Semi-Opaque Polycarbonate Diffuser
- CSA Approved Wet Location For Wall Mounting -Down Light only
- LED Light Fixture
- Mounting Hardware Included

LINE DRAWING

LINE DRAWING NOT TO SCALE

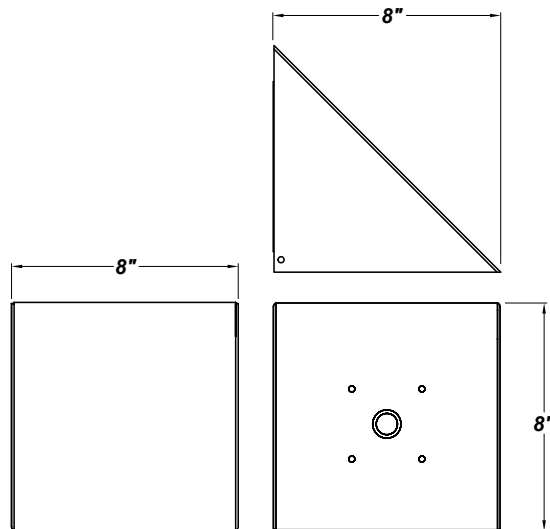

FINISHES

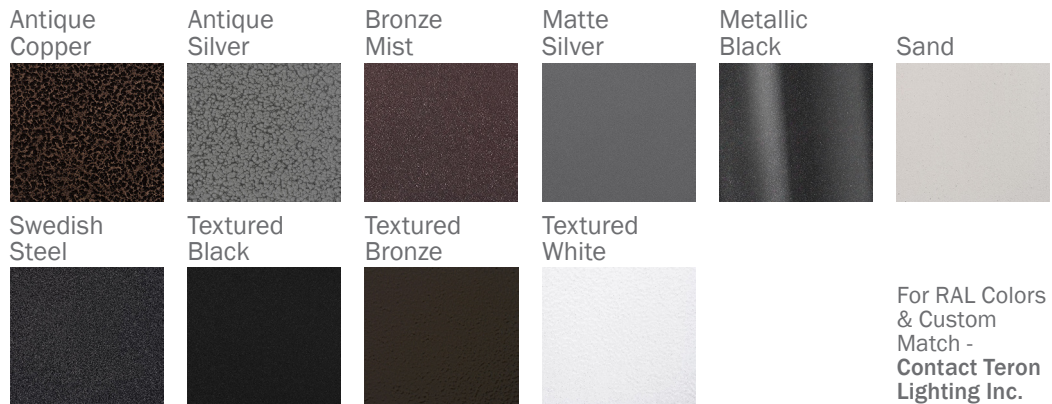

TRITON MINI LED

Architectural Outdoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|------------------------------|--|--------------------------------|---|
| TTM - Triton MINI LED | L12.5-LT350 - 12.5W LED Board @ 350mA ELV Low Voltage 2-Wire Dimming Electronic Driver (Leading or Trailing Edge) L18.0-LT500 - 18.0W LED Board @ 500mA ELV Low Voltage 2-Wire Dimming Electronic Driver (Leading or Trailing Edge) | 120-277V (50 / 60Hz) | See Source/Wattage for Dimming Options |
| ORDER INFO | | | |
| TTM | L12.5-LT350 | 120-277V | |

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|-----------------------|--|--|---|
| Not Applicable | AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver (Standard) MB - Metallic Black SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp | F - Fused PCL120 - Photocell 120V PCL277 - Photocell 277V TP - Tamper Resistant Screws |
| ORDER INFO | | | |
| Not Applicable | AC | 30K | F |

Example ^ (may not represent a manufacturable product)

| PROD | SOURCE | 30K SPECS | 40K SPECS | | | |
|------------|--------|--|--|--|--|--|
| TTM | L12.5 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 1615 LED Source Lumens 154 LED Source Lumens per Watt | <ul style="list-style-type: none"> 40K - 4000K Color Temp 1690 Source Lumens 161 LED Source Lumens per Watt | | | |
| | L18.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 2427 LED Source Lumens 162 LED Source Lumens per Watt | <ul style="list-style-type: none"> 40K - 4000K Color Temp 2450 LED Source Lumens 163 LED Source Lumens per Watt | | | |

| REPLACEMENT PART | PART NO | NOTES |
|------------------------------------|---------|-------|
| Semi-Opaque Polycarbonate Diffuser | 3409660 | |

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.