

PROJECT :
TYPE :
ORDERING # :
COMMENTS :




**FUSION SCP LED**

**FEATURES**



- Steel Trim w/ Matte Silver Powder Coat Finish
- Luminous White Acrylic Diffuser
- Aluminum Mounting Pan w/Hi-Reflectance White Powder Coat Finish
- Fixture Mounts Directly to Surface (Centered Over J-Box) w/ Four Washers & Wall Anchors (Not Included)
- Constant Current at 350 Milliamps
- Surge Protector
- Lighting Facts & CSA Listed Damp Location For Ceiling Mount
- IES & Photometric Files Available
- Awaiting Title 24 Labeling / Certification

SOURCE/WATTAGE	30K SPECIFICATIONS
<b>L50.0</b> - (4) 12.5W LED Boards - Constant Current @1750mA - 50.0 Input Watts  50,000 Hours(L70)	<b>50.0W LED ARRAY</b> <b>30K</b> - 3000K Color Temp. - 80 CRI Typ. - Constant Current at 1750 Milliamps By Driver - 62W Input = 3408.7 LED Delivered Lumens - 55 Delivered Lumens Per Watt

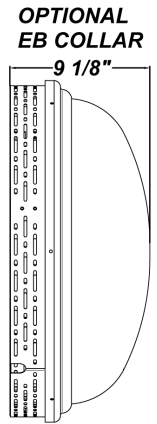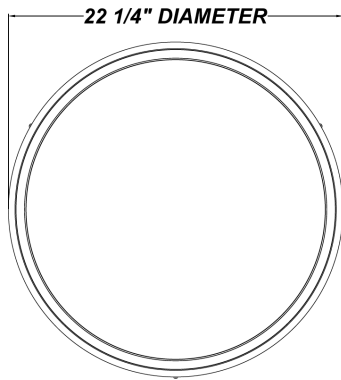

**ORDERING INFORMATION**

**Example : (FUN-SCP - L50.0 - 120-277V - ZE1750 - BT - 40K) Matte Silver is Standard Finish**

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DRIVER	FINISH	OPTIONS
<b>Fusion SCP</b>	<b>L50.0</b> - (4) 12.5W (40) LED Modules	<b>120 - 277V</b> (50 / 60Hz)	<b>ZE1750</b> - 1750mA Line Voltage 4-Wire Dimming Driver <b>(For L50.0) (Dimmable 0 - 10V)</b>	<b>SM</b> - Matte Silver <b>TB</b> - Textured Black <b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>CP</b> - Copper <b>KC</b> - Kenworth Chrome <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White  <b>RAL Colors or Custom Match - Consult Factory</b>	<b>27K</b> - 2700K Color Temperature <b>30K</b> - 3000K Color Temperature <b>35K</b> - 3500K Color Temperature <b>40K</b> - 4000K Color Temperature <b>MS</b> - MSI-HFLUM2-WR <b>TP</b> - Tamper-Proof Screw Set <b>F</b> - Fused <b>EB/BB</b> - Integral Emergency Driver w/ Slotted Collar (Required) (Please Specify Voltage When Ordering) <b>BB</b> - Slotted Collar  <b>See Page 2 For Wattage Specifications</b>

**REPLACEMENT PARTS PART NO.**

White Acrylic Lens	3052260
--------------------	---------

**NOTES**

**Emergency Driver**  
Initial light output in Emergency mode will last for a minimum of 90 minutes.  
**EB:** Iota ILB-CP10-B - Temperature Rating 0° to 55° C

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

