

ZENITH LG LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




FEATURES

- Aluminum Trim w/ Matte Silver Powder Coat Finish
- Aluminum Mounting Pan w/ High Reflectance White Powder Coat Finish
- White 75% DR Acrylic Lens
- Mounts Direct to 4" Junction Box w/ 4 Wall Anchors (By Others) (Not Included)
- 0-10V Dimming Driver
- Surge Protector
- Integral LED EM Driver Available (66.4W Maximum)
- IES Files Available
- ADA Compliant
- CSA Listed Wet Location For Wall Mount
- CSA Listed Damp Location For Ceiling Mount
- LED Light Fixture
- Vandal Resistant

LINE DRAWING

LINE DRAWING NOT TO SCALE

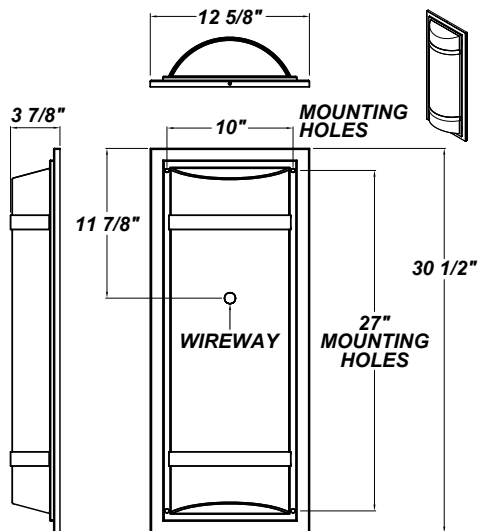


FINISHES

Antique Copper




Antique Silver




Bronze Mist




Matte Silver



Metallic Black




Sand



Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

ZENITH LG LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
ZENL - Zenith LG	L32.2-ZE700 - 32.2W @ 700mA 0-10V Dimming Driver L48.3-ZE1200 - 48.3W @ 1200mA 0-10V Dimming Driver L64.4-ZE1600 - 64.4W @ 1600mA 0-10V Dimming Driver	120-277V	Not Applicable
ORDER INFO			
ZENL	L32.2-ZE700	120-277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper TB - Textured Black AS - Antique Silver BT - Bronze Mist BZ - Textured Bronze SM - Matte Silver (Standard) TW - Textured White MB - Metallic Black SN - Sand SW - Swedish Steel	40K - 4000K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp.	EB - Integral Emergency Driver (Please Specify Voltage When Ordering) F - Fused MSI - Steinel HFLUM2-WR Internal Motion Sensor (120V / 277V Only) TP - Tamper Resistant Screws
ORDER INFO			
Not Applicable	AC	40K	EB

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
ZENL	L32.2	<ul style="list-style-type: none"> 30K - 3000K Color Temp. 3215 LED Source Lumens 99.8 LED Source Lumens Per Watt 			
	L48.3	<ul style="list-style-type: none"> 30K - 3000K Color Temp. 4474 LED Source Lumens 92.6 LED Source Lumens Per Watt 			
	L64.4	<ul style="list-style-type: none"> 30K - 3000K Color Temp. 6152 LED Source Lumens 95.5 LED Source Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
White 75% DR Acrylic Lens	3051260	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.