## MYRTLE BEACH II LED

Architectural Indoor

## (S) 🗗 🛐





### PROJECT: QTY: COMMENTS:


### **FEATURES**

- Aluminum Mounting Pan and Stems w/ Matte Silver Powder Coat Finish
- CSA Listed Damp Location
- LED Light Fixture
- Luminous White Acrylic Diffuser
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)

TYPE: PO#:





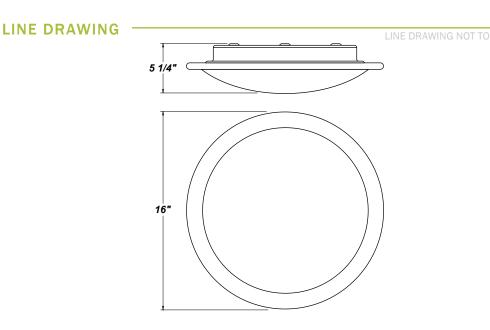





TERONLIGHTING.COM 33 DONALD DR, FAIRFIELD, OH 45014 P: 513.858.6004 F: 513.858.6038 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

# MYRTLE BEACH II LED

Architectural Indoor

#### 1. ...

PROJECT:		
TYPE:		
PO#:	QTY:	
COMMENTS:		

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
MHT - Myrtle Beach II	L13.0-ZE560 - (48) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L16.3-ZE560 - (60) LED Array @ Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L21.0-ZE700 - (60) LED Array @ Line Voltage 4-Wire Dimming Driver	<b>120V - 277V</b> (50 / 60Hz)	Not Applicable
ORDER INFO	(Dimmable 0 - 10V)		
MHT	L13.0-ZE560	120V - 277V	Not Applicable

#### Aesthetics & Options

TRIM		FINISH	COLOR TEMP	OPTIONS
Not Applicab	le	AC - Antique CopperTB - Texture BlackAS - Antique SilverBlackBT - Bronze Mist (Standard)BZ - Texture BronzeSM - Matte SilverTW - Texture 	d         35K - 3500K Color Temp           40K - 4000K Color Temp	<b>F</b> - Fused <b>WAL</b> - White Acrylic <b>WLL</b> - White Acrylic Formulate For LED Fixtures
RDER INFO				
Not Applica	ble	AC	30K	F
Example ^				
PROD	SOURCE	30K SPECS		
МНТ	L13.0 L16.3 21.0	<ul> <li>80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>1700 LED Source Lumens</li> <li>130.8 LED Source Lumens Per Watt</li> <li>80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>2110 LED Source Lumens</li> <li>129.4 LED Source Lumens Per Watt</li> <li>80 CRI Typ.</li> <li>30K - 3000K</li> </ul>		
		Color Temp • 2640 LED Source Lumens • 125.7 LED Source Lumens Per Watt		

REPLACEMENT PART	PARINO	NOTES
White Acrylic Diffuser	3021460	
White Acrylic LED Diffuser	3053360	Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM 33 DONALD DR, FAIRFIELD, OH 45014 P: 513.858.6004 F: 513.858.6038 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice. 2