

CONCORDE W LED



PROJECT :
TYPE :
ORDERING # :
COMMENTS :


FEATURES

Housing:

- 18 Gauge Steel (Perforated) w/ Matte Silver Polyester Powder Coat Finish
- Matte White Acrylic Diffuser

Internal Fixture:

- Die-Cast Aluminum Ballast Housing w/ Textured Black Powder Coat Finish
- Clear Polycarbonate Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Thermal Compensation Technology Ensures Longer LED Lifetime, Which is Ideal For Fixtures Being Placed in Area With Fluctuating or Higher Ambient Temperatures
- 100V - 277V
- Integral EM Battery Available (Voltage Must be Specified When Ordering)
- One 40W LED Driver
- Surge Protector
- CSA Listed Wet location For Wall Mounting
- Awaiting IES Files, Lighting Facts, And Title 24 Labeling / Certification

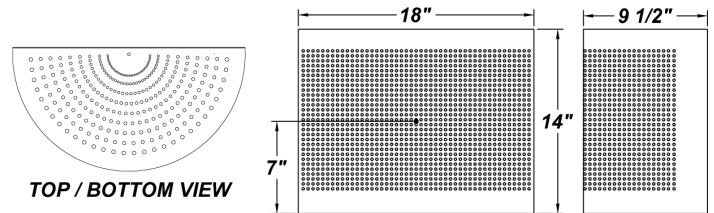

ORDERING INFORMATION

Example : (CNCW - L33.6 - 100-277V - WAL - TB - 40K)

Matte Silver is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
CNCW					
Concorde W	L24.5 - (8) 3.066W LED Strips 3.066W LED Strips - (LM80 Standard) **40,000 Hours(L70)	100 - 277V	WAL - White Acrylic	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	30K - 3000K Color Temp. 45.2W Input = Estimated 30.4 Lumens Per Watt 40K - 4000K Color Temp. 45.2W Input = Estimated 33.4 Lumens Per Watt 50K - 5000K Color Temp. 45.2W Input = Estimated 39.8 Lumens Per Watt F - Fused DL - Down Light EB - Bodine BSL26 - Will light 4 LED Modules - on Down Side of Fixture - AC Mode 960 Lumens - Battery @ 1 second = 322 Total Lumens - Battery @ 90 Minutes = 291 Total Lumens PCL120 - 120v Photocell PCL277 - 277v Photocell Please Note: 120V or 277V Must Be Specified When Ordering The EB Option

REPLACEMENT PARTS

PART NO.

White Acrylic Lens	3024260
Housing (Specify Housing Color)	6035699
Internal Polycarbonate Lens	34065

NOTES

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

