


GALAXY W LED

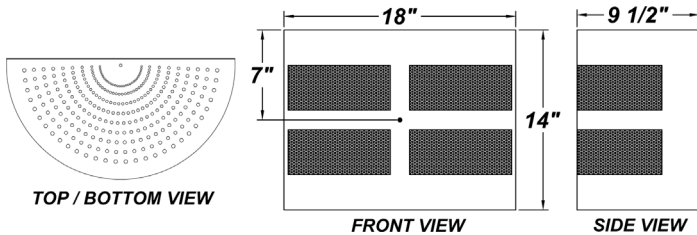

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

Housing:

- 18 Gauge Steel w/ Textured Black Polyester Powder Coat Finish
- Matte White Acrylic Diffuser

Internal Fixture:

- Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
- Clear Polycarbonate Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Thermal Compensation Technology Ensures Longer LED Lifetime, Which is Ideal For Fixtures Being Placed in Area With Fluctuating or Higher Ambient Temperatures
- 100V - 277V
- Integral EM Battery Available (Voltage Must be Specified When Ordering)
- One 40W LED Driver
- Surge Protector
- CSA Listed Wet location For Wall Mounting
- Awaiting IES Files, Lighting Facts, And Title 24 Labeling / Certification

ORDERING INFORMATION

Example : (GLXW - L24.5 - 100-277V - WAL - SW - 50K)

Textured Black is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Galaxy W	L24.5 - (8) 3.066W LED Strips 3.066W LED Strips - (LM80 Standard) **40,000 Hours(L70)	100 - 277V	WAL - White Acrylic	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	30K - 3000K Color Temp 40K - 4000K Color Temp. 50K - 5000K Color Temp. PCL - Photocell 120/277V TP - Tamper-Proof Screw Set F - Fused DL - Down Light EB - Bodine BSL26 - Will light 4 LED Modules - on Down Side of Fixture - AC Mode 960 Lumens - Battery @ 1 second = 322 Total Lumens - Battery @ 90 Minutes = 291 Total Lumens Please Note: 120V or 277V Must Be Specified When Ordering The EB Or PCL Options

REPLACEMENT PARTS	PART NO.
White Acrylic Lens	3024260
Housing (Specify Housing Color)	6035699
Internal Polycarbonate Lens	34065

NOTES

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.





PROJECT :
TYPE :
ORDERING # :
COMMENTS :

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS	40K SPECIFICATIONS	50K SPECIFICATIONS
Galaxy W LED	L24.5 - (8) 3.066 LED Modules - (1) 40 Watt Driver 4.2W LED Modules - (LM80 Standard) **40,000 Hours(L70)	L24.5 - Eight 4.2W LED Modules 30K - 3000K Color Temp. - 9 Brillia ThermAdjust LEDs Per Module - SW30Bin, Color Temp = 3000K Nominal - Voltage Regulated at 12 Volts by Driver - 80 CRI typ. (75 CRI min) 2528 Board Lumens - 33W Input = Estimated 76.6 Lumens Per Watt	L33.6 - Eight 4.2W LED Modules 40K - 4000K Color Temp. - 9 Brillia ThermAdjust LEDs Per Module - SW40Bin, Color Temp = 4000K Nominal - Voltage Regulated at 12 Volts by Driver - 80 CRI typ. (75 CRI min) 2640 Board Lumens - 33W Input = Estimated 80 Lumens Per Watt	L33.6 - Eight 4.2W LED Modules 50K - 5100K Color Temp. - 9 Brillia ThermAdjust LEDs Per Module - SW50Bin, Color Temp = 5000K Nominal - Voltage Regulated at 12 Volts by Driver - 80 CRI typ. (75 CRI min) 2880 Board Lumens - 33W Input = Estimated 82.3 Lumens Per Watt

ARRA 2009



BUY AMERICA ACT