

# ASHWORTH EYE LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




## FEATURES


- 380 Grade Die-Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Die-Cast Aluminum Fascia w/ Textured Black Polyester Powder Coat Finish
- Clear Prismatic Ribbed Molded Borosilicate Glass Lens
- Fully Silicone Gasketed Channel
- Stainless Steel Zinc Coated Screws
- Cast-In Template
- Mounts Direct to Flat Surface w/Four #8 Wall Anchors (Not Included)
- 0-10V Programmable Dimming Driver
- Surge Protector
- CSA Listed Wet Location For Wall or Ceiling Mount
- Emergency Battery Available
- LED Light Fixture
- Vandal Resistant

## LINE DRAWING

LINE DRAWING NOT TO SCALE

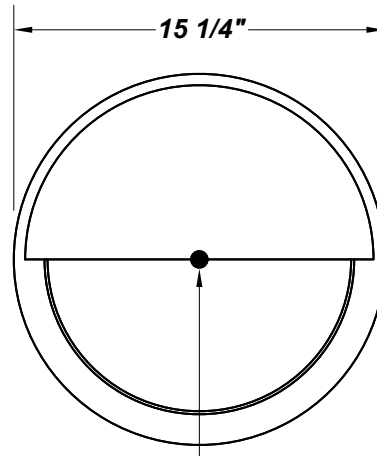


**REAR  
CONDUIT ENTRY**

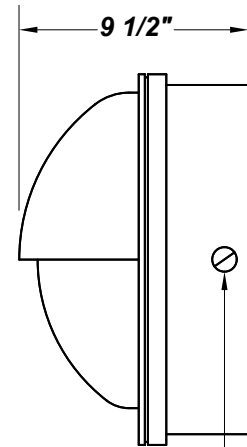


**CONDUIT ENTRY  
4 PLACES 90° APART**

## FINISHES

Antique  
CopPer




Antique  
Silver




Bronze  
Mist




Matte  
Silver



Metallic  
Black




Sand



Swedish  
Steel




Textured  
Black



Textured  
Bronze



Textured  
White



For RAL Colors  
& Custom  
Match -  
Contact Teron  
Lighting Inc.

# ASHWORTH EYE LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING BALLAST
AH - Ashworth	L30.0-ZE1000 - (80) LED Array @ 1000mA 4-Wire 0-10V Dimming Driver	120V 277V	Not Applicable
ORDER INFO			
AH	L30.0-ZE1000	120V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
EYE	<b>AC</b> - Antique CopPer <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>MB</b> - Metallic Black <b>SM</b> - Matte Silver <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>TB</b> - Textured Black (Standard) <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp	<b>EB</b> - Emergency Driver (120V - 277V Only) (Please Specify Voltage When Ordering) <b>F</b> - Fused <b>PCL</b> - Photocell <b>TP</b> - Tamper Resistant Screws
ORDER INFO			
EYE	AC	30K	EB

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
AH	L30.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>4855 LED Source Lumens</li> <li>161.8 LED Source Lumens Per Watt</li> </ul>			

REPLACEMENT PART	PART NO	NOTES
Clear Prismatic Glass Lens	37042	
EYE Fascia (Specify Finish)	5506599	

Don't see the configuration you are looking for?  
Call us today at (513) 858-6004



TERONLIGHTING.COM  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.