

ASHWORTH RNG LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




FEATURES


- 380 Grade Die-Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Die-Cast Aluminum Fascia w/ Textured Black Polyester Powder Coat Finish
- Clear Prismatic Ribbed Molded Borosilicate Glass Lens
- Fully Silicone Gasketed Channel
- Stainless Steel Zinc Coated Screws
- Cast-In Template
- Mounts Direct to Flat Surface w/Four #8 Wall Anchors (Not Included)
- 0-10V Programmable Dimming Driver
- Surge Protector
- CSA Listed Wet Location For Wall or Ceiling Mount
- Emergency Battery Available
- LED Light Fixture
- Vandal Resistant

LINE DRAWING

LINE DRAWING NOT TO SCALE

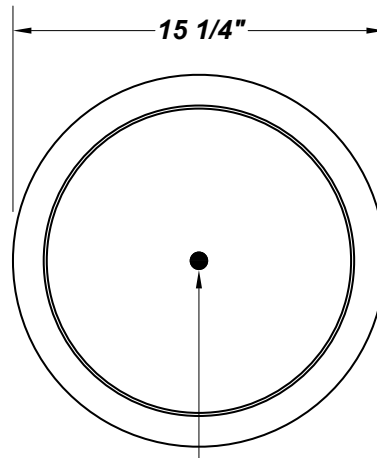


**REAR
CONDUIT ENTRY**

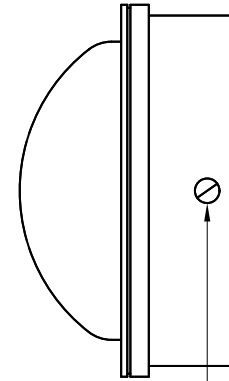


**CONDUIT ENTRY
4 PLACES 90° APART**

FINISHES

Antique
CopPer




Antique
Silver




Bronze
Mist




Matte
Silver



Metallic
Black




Sand



Swedish
Steel




Textured
Black



Textured
Bronze



Textured
White



For RAL Colors
& Custom
Match -
**Contact Teron
Lighting Inc.**

ASHWORTH RNG LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING BALLAST
AH - Ashworth	L30.0-ZE1000 - (80) LED Array @ 1000mA 4-Wire 0-10V Dimming Driver	120V 277V	Not Applicable
ORDER INFO			
AH	L30.0-ZE1000	120V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
RNG	AC - Antique CopPer AS - Antique Silver BT - Bronze Mist MB - Metallic Black SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp	EB - Emergency Driver (120V - 277V Only) (Please Specify Voltage When Ordering) F - Fused PCL - Photocell TP - Tamper Resistant Screws
ORDER INFO			
RNG	AC	30K	EB

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
AH	L30.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 4855 LED Source Lumens 161.8 LED Source Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
Clear Prismatic Glass Lens	37042	
RNG Fascia (Specify Finish)	5510999	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.