


# DRIVER LED

## Architectural Outdoor

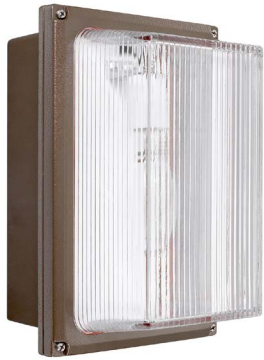


PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

### FEATURES


- Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Clear Prismatic Ribbed Molded Polycarbonate Lens
- CSA Listed Wet Location For Surface Mount
- Dimming 0-10V
- Emergency Battery Available (Wall Mount Only)
- Fully Gasketed
- LED Light Fixture
- Mounts Direct to Flat Surface w/ Four #8 Wall Anchors (Not Included)
- Surge Protector

### LINE DRAWING

LINE DRAWING NOT TO SCALE

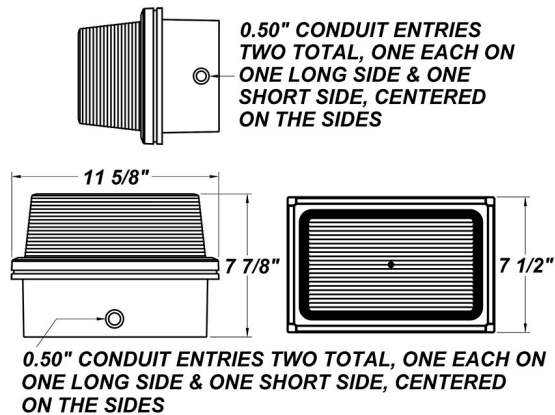

### FINISHES

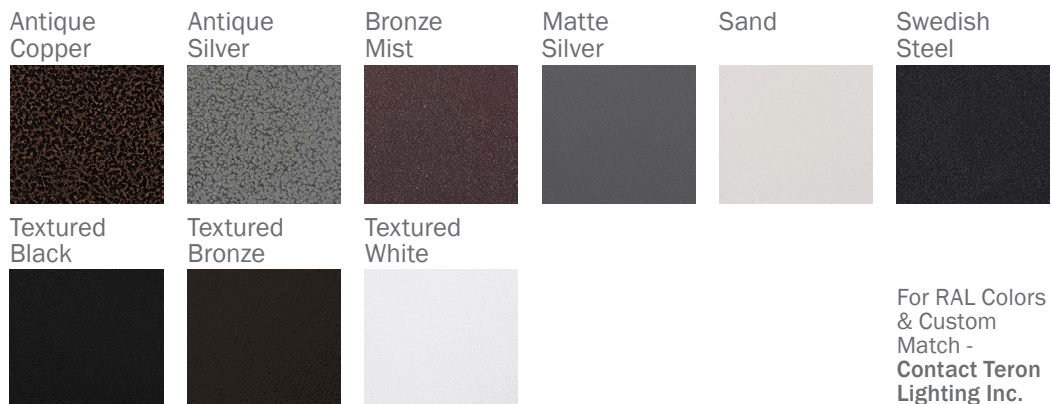

# DRIVER LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
DR - Driver	<b>L20.0-ZE500</b> - 20W LED Strips @ 500mA 0-10V Dimming Driver <b>L26.0-ZE600</b> - 26W LED Strips @ 600mA 0-10V Dimming Driver <b>L28.0-ZE700</b> - 28W LED Strips @ 700mA 0-10V Dimming Driver	<b>120-277V</b>	<b>0-10V</b>
ORDER INFO			
DR	L20.0	120-277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
<b>Not Applicable</b>	<b>AC</b> - Antique Copper <b>TB</b> - Textured Black <b>AS</b> - Antique Silver <b>BZ</b> - Textured Bronze <b>BT</b> - Bronze Mist        (Standard) <b>SM</b> - Matte Silver <b>TW</b> - Textured White <b>SN</b> - Sand <b>SW</b> - Swedish Steel	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>EB</b> - 5W Integral EM Battery <b>F</b> - Fused <b>PCL120</b> - Photocell 120V <b>PCL277</b> - Photocell 277V <b>TP</b> - Tamper Resistant Screws <b>UDL</b> - Up / Down Light
ORDER INFO			
Not Applicable	BZ	30K	EB

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS				
DR	L20.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>1264 Source Lumens</li> <li>104.6 Source Lumens Per Watt</li> </ul>				
	L26.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>2511.4 Source Lumens</li> <li>95.6 Source Lumens Per Watt</li> </ul>				
	L28.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>2930 Source Lumens</li> <li>104.6 Source Lumens Per Watt</li> </ul>				

REPLACEMENT PART	PART NO	NOTES
Clear Polycarbonate Diffuser	34065	

Don't see the configuration you are looking for?  
Call us today at (513) 858-6004



TERONLIGHTING.COM  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.