

# ECLIPSE S LED

Architectural Indoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

## FEATURES

- 18 Gauge Steel Fascia w/ Matte Silver Powder Coat Finish
- Luminous White Acrylic w/ White Perf Covering Lens Panel
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Open Top and Bottom
- Mounts Directly to 4" Junction Box (By Others)
- One 12.6W LED Driver Per 12.5W Module
- 120V Drivers Are Dimmable
- 277V Drivers Are Not Dimmable
- ADA Compliant
- CSA Listed Dry Location For Wall Mounting
- LED Light Fixture
- Mounting Hardware Included

## LINE DRAWING

LINE DRAWING NOT TO SCALE

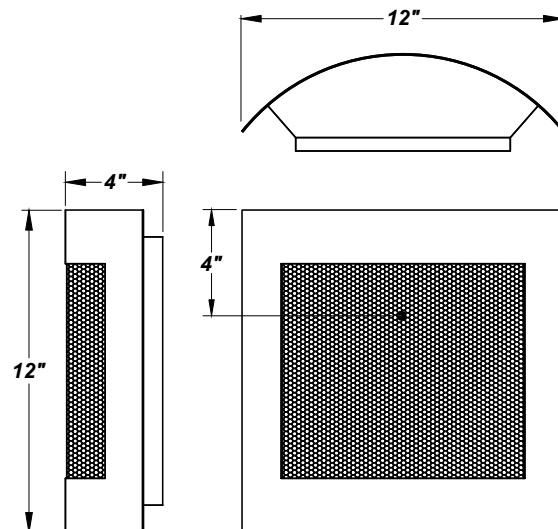


## FINISHES

Antique Copper



Antique Silver




Bronze Mist




Matte Silver



Metallic Black




Sand



Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

# ECLIPSE S LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
ECLS - Eclipse S	<b>L12.5</b> - (1) 12.5W (40) LED Module <b>L25.0</b> - (2) 12.5W (40) LED Modules	<b>120V</b> <b>270V</b> (50 / 60Hz)	<b>Not Applicable</b>
ORDER INFO			
ECLS Example ^	L12.5	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
<b>Not Applicable</b>	<b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>MB</b> - Metallic Black <b>SM</b> - Matte Silver (Standard) <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>TB</b> - Textured Black <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp	<b>F</b> - Fused <b>PWL</b> - White Acrylic w/ White Mylar Perf (Standard) <b>WAL</b> - White Acrylic
ORDER INFO			
Not Applicable Example ^	AC	30K	PWL

PROD	SOURCE	30K SPECS				
ECLS	L12.5	<ul style="list-style-type: none"> <li>80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>1195 LED Source Lumens</li> <li>95.6 LED Source Lumans Per Watt</li> </ul>				
	L25.0	<ul style="list-style-type: none"> <li>80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>2390 LED Source Lumens</li> <li>95.6 LED Source Lumans Per Watt</li> </ul>				

REPLACEMENT PART	PART NO	NOTES
White Perf Acrylic Lens	3098060	Dimmable to <5% 120V Dimmable With Either Triac or ELV Dimmers
White Acrylic Lens	3097660	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM  
33 DONALD DR, FAIRFIELD, OH 45014  
P: 513.858.6004 F: 513.858.6038  
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.