

# OMEGA W LED

Architectural Outdoor






PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

## FEATURES



- 18 Gauge Steel w/ Matte Silver Polyester Powder Coat Finish
- Matte White Acrylic Diffuser
- Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
- Clear Polycarbonate Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Thermal Compensation Technology Ensures Longer LED Lifetime, Which is Ideal For Fixtures Being Placed in Area With Fluctuating or Higher Ambient Temperatures
- CSA Listed Wet location For Wall Mounting
- Emergency Battery Available
- LED Light Fixture
- Mounting Hardware Included

## LINE DRAWING


LINE DRAWING NOT TO SCALE

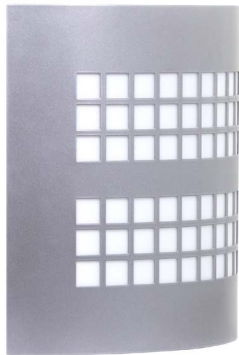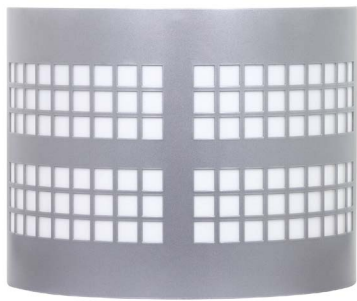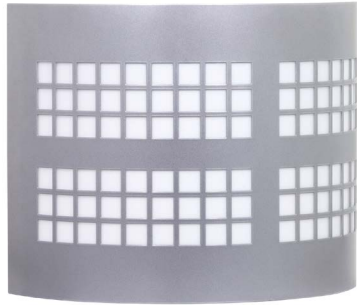

TOP/BOTTOM VIEW



SIDE VIEW

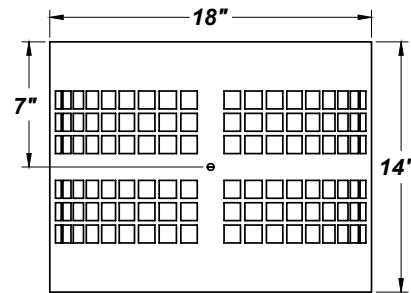


FRONT VIEW

## FINISHES

Antique Copper




Antique Silver




Bronze Mist




Matte Silver



Metallic Black




Sand



Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

# OMEGA W LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING BALLAST
OMGW - Omega W	L24.5 - (8) 3.066W LED Strips	100 - 277V	Not Applicable
ORDER INFO			
OMGW	L24.5	100 - 277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	<b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>BN</b> - Brushed Nickel <b>SM</b> - Matte Silver (Standard) <b>MB</b> - Metallic Black <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>TB</b> - Textured Black <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White	<b>27K</b> - 2700K Color Temp <b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>PCL120</b> - 120V Photocell <b>PCL277</b> - 277V Photocell <b>TP</b> - Tamper-Proof Screw Set <b>F</b> - Fused <b>DL</b> - Down Light <b>EB</b> - Emergency Battery (120V or 277V Must Be Specified When Ordering The EB Option)
ORDER INFO			
Not Applicable	AC	27K	PCL120

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
OMGW	L24.5	<ul style="list-style-type: none"> <li>80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>2528 LED Source Lumens</li> <li>103.2 LED Source Lumens Per Watt</li> </ul>			

REPLACEMENT PART	PART NO	NOTES
White Acrylic Lens	3024260	Don't see the configuration you are looking for? Call us today at (513) 858-6004
Housing (Specify Housing Color)	6035499	
Internal Polycarbonate Lens	34065	



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.