

# TRADITIONS 13" LED

Architectural Indoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

## FEATURES


- Aluminum Mounting Pan with Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- ADA Compliant
- CSA Listed Damp Location
- Mounting Hardware Included



## LINE DRAWING

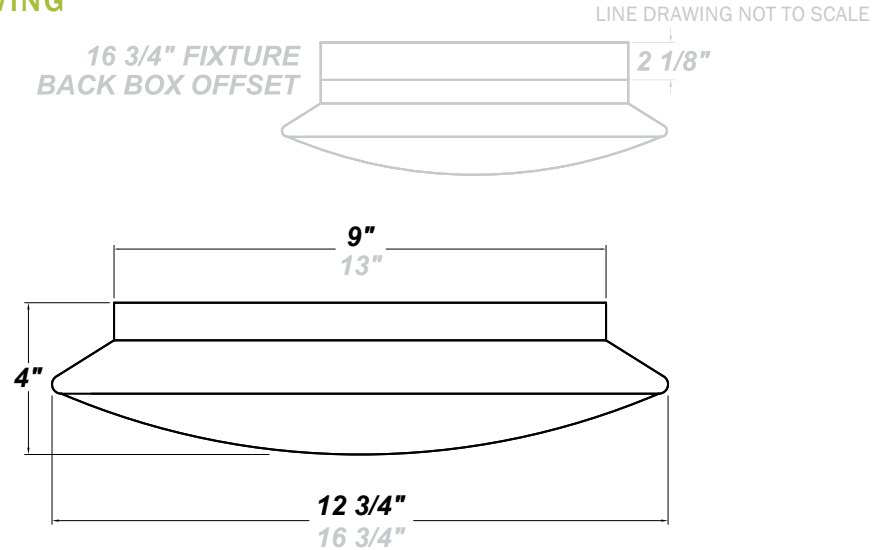

## FINISHES

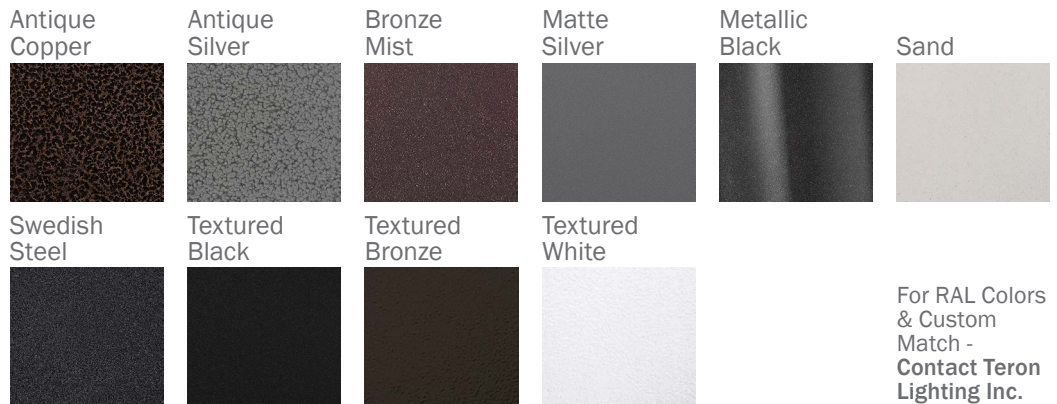

# TRADITIONS 13" LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
TN - Traditions 13"	L13.0-ZE560 - (48) LED Array @ 560mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120-277V (50 / 60Hz)	Not Applicable
ORDER INFO			
TN Example ^	L13.0-ZE560	120-277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	<b>WH</b> - White <b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>MB</b> - Metallic Black <b>SM</b> - Matte Silver (Standard) <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>TB</b> - Textured Black <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White	<b>27K</b> - 2700K Color Temp <b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp	<b>F</b> - Single Fuse <b>STC12-WH</b> - 12" Stem & Canopy Kit* <b>STC24-WH</b> - 24" Stem & Canopy Kit* <b>STC36-WH</b> - 36" Stem & Canopy Kit* <b>STC48-WH</b> - 48" Stem & Canopy Kit*
ORDER INFO			
Not Applicable Example ^	WH	27K	F

PROD	SOURCE	30K SPECS			
TN	L13.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>1700 LED Source Lumens</li> <li>105 LED Source Lumens Per Watt</li> </ul>			

REPLACEMENT PART	PART NO	NOTES
12" White Acrylic Diffuser	3027560	*Stem & Canopy kits are white by default, if another color is needed consult factory  Don't see the configuration you are looking for? Call us today at (513) 858-6004



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.