

BARTON CREEK LED 24"


Architectural Indoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

FEATURES


- Steel Housing w/ Swedish Steel Powder Coat Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Panels
- Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- ADA Compliant
- CSA Listed Damp Location For Wall or Ceiling Mounting
- LED Light Fixture



LINE DRAWING

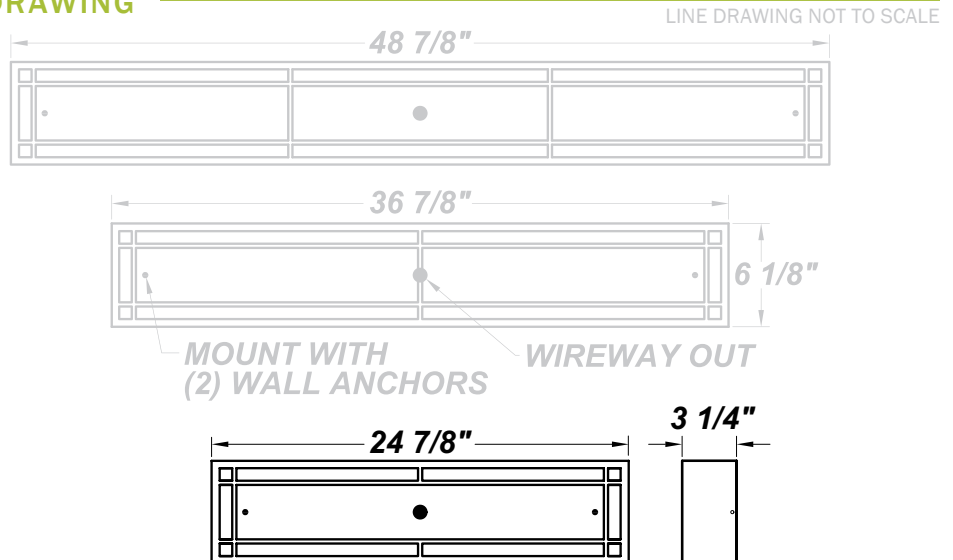

FINISHES

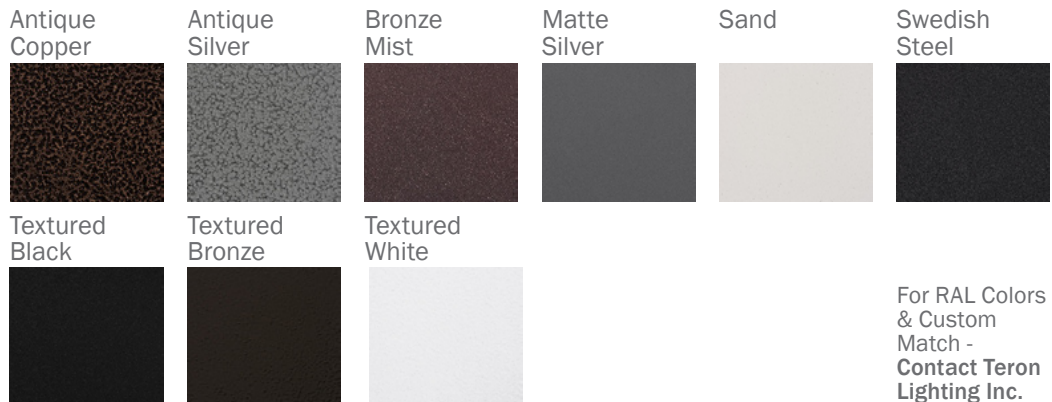

BARTON CREEK LED 24"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
BT24 - Barton Creek 24"	L22.0-LT700 - 22W @ 700mA ELV Dimming Driver L33.0-LT1000 - 33W @ 1000mA ELV Dimming Driver L33.0-ZE1000 - 33W @ 1000mA 0-10V Dimming Driver L36.0-ZE1100 - 36W @ 1100mA 0-10V Dimming Driver	120V 277V (120-230V Dimmable)	Not Applicable
ORDER INFO			
BT24 Example ^	L22.0-LT700	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel (Standard) TB - Textured Black BZ - Textured Bronze TW - Textured White	27K - 2700K Color Temp 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	F - Fused TP - Tamper Resistant Screws WAL - White Acrylic Lens WLL - High Lumen White Acrylic Lens (Standard)
ORDER INFO			
Not Applicable Example ^	AC	27K	F

PROD	SOURCE	30K SPECS				
BT 24"	L22.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 3479 LED Source Lumens 145 LED Source Lumens Per Watt 				
	L33.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 4970 LED Source Lumens 145 LED Source Lumens Per Watt 				
	L36.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 5467 LED Source Lumens 145 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
24" White Acrylic Front Lens Panel	3028460	
24" White Acrylic Side Lens Panel	3028360	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.