

# BARTON CREEK LED 24"


Architectural Indoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

## FEATURES


- Steel Housing w/ Swedish Steel Powder Coat Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Panels
- Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- ADA Compliant
- CSA Listed Damp Location For Wall or Ceiling Mounting
- LED Light Fixture

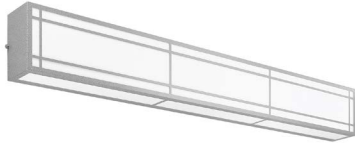

## LINE DRAWING

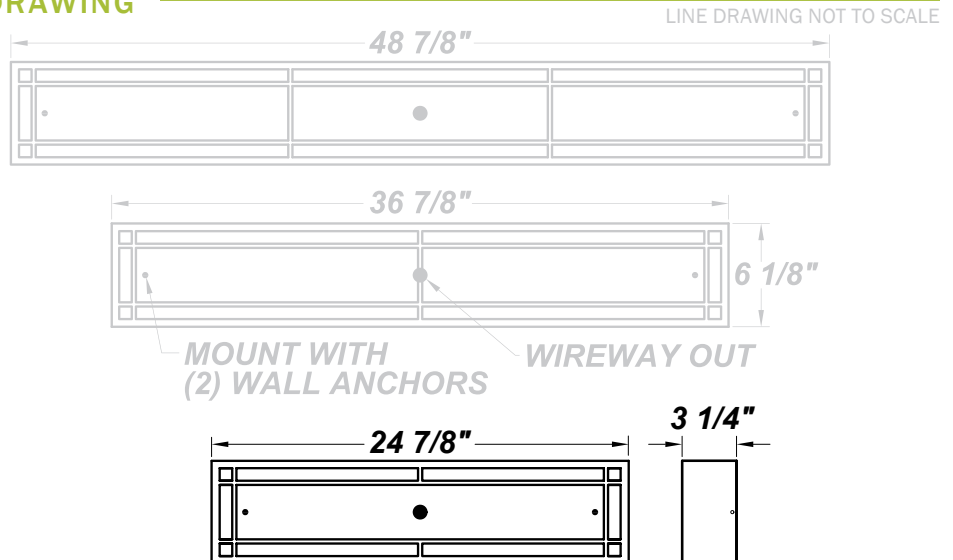

## FINISHES

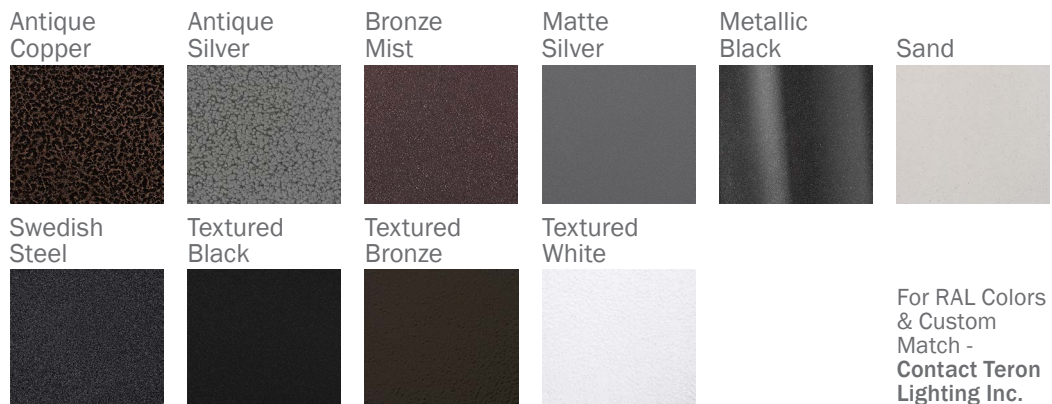

# BARTON CREEK LED 24"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
<b>BT24</b> - Barton Creek 24"	<b>L22.0-LT700</b> - 22W @ 700mA ELV Dimming Driver <b>L33.0-LT1000</b> - 33W @ 1000mA ELV Dimming Driver <b>L33.0-ZE1000</b> - 33W @ 1000mA 0-10V Dimming Driver <b>L36.0-ZE1100</b> - 36W @ 1100mA 0-10V Dimming Driver	<b>120V</b> <b>277V</b> (120-230V Dimmable)	<b>Not Applicable</b>
ORDER INFO			
BT24 Example ^	L22.0-LT700	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
<b>Not Applicable</b>	<b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>MB</b> - Metallic Black <b>SM</b> - Matte Silver <b>SN</b> - Sand <b>SW</b> - Swedish Steel (Standard) <b>TB</b> - Textured Black <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White	<b>27K</b> - 2700K Color Temp <b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>F</b> - Fused <b>TP</b> - Tamper Resistant Screws <b>WAL</b> - White Acrylic Lens <b>WLL</b> - High Lumen White Acrylic Lens (Standard)
ORDER INFO			
Not Applicable Example ^	AC	27K	F

PROD	SOURCE	30K SPECS				
<b>BT 24"</b>	L22.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>3479 LED Source Lumens</li> <li>145 LED Source Lumens Per Watt</li> </ul>				
	L33.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>4970 LED Source Lumens</li> <li>145 LED Source Lumens Per Watt</li> </ul>				
	L36.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>5467 LED Source Lumens</li> <li>145 LED Source Lumens Per Watt</li> </ul>				

REPLACEMENT PART	PART NO	NOTES
24" White Acrylic Front Lens Panel	3028460	
24" White Acrylic Side Lens Panel	3028360	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.