

BARTON CREEK LED 48"


Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- Steel Housing w/ Swedish Steel Powder Coat Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Panels
- Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- ADA Compliant
- CSA Listed Damp Location For Wall or Ceiling Mounting
- Emergency Battery Available
- LED Light Fixture

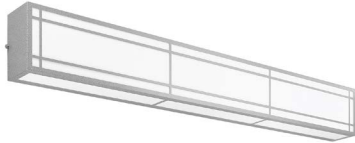

LINE DRAWING

LINE DRAWING NOT TO SCALE

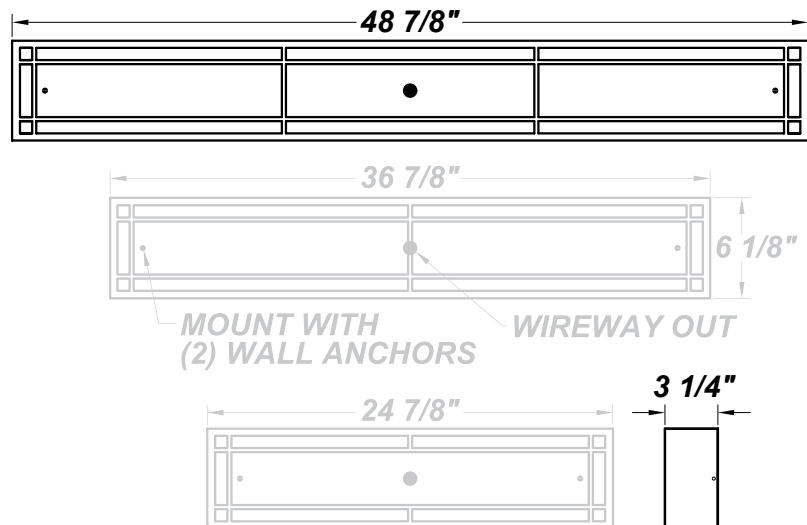


FINISHES


Antique Copper




Antique Silver




Bronze Mist




Matte Silver



Metallic Black




Sand




Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

BARTON CREEK LED 48"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
BT48 - Barton Creek 48"	L64.0-ZE2000 - 64W @ 2000mA 0-10V Dimming Driver L72.0-ZE2200 - 72W @ 2200mA 0-10V Dimming Driver	120V 277V (120-230V Dimmable)	Not Applicable
ORDER INFO			
BT48 Example ^	L64.0-ZE2000	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist MB - Metallic Black SM - Matte Silver SN - Sand SW - Swedish Steel (Standard) TB - Textured Black BZ - Textured Bronze TW - Textured White	27K - 2700K Color Temp 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	EB - 5.1W Intergral Emergency Battery F - Fused TP - Tamper Resistant Screws WAL - White Acrylic Lens WLL - High Lumen White Acrylic Lens (Standard)
ORDER INFO			
Not Applicable Example ^	AC	27K	EB

PROD	SOURCE	30K SPECS				
BT 48"	L64.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 9277 LED Source Lumens 145 LED Source Lumens Per Watt 				
	L72.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 10437 LED Source Lumens 145 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
48" White Acrylic Front Lens Panel	3028060	
48" White Acrylic Side Lens Panel	3027960	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.