

ALLEGRO W RND LED

Architectural Outdoor



| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |




FEATURES

- Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Aluminum End Caps and Trim Bars w/ Textured Black Polyester Powder Coat Finish
- Aluminum Mount Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Wrap-Around Diffuser
- Luminous White Acrylic Top and Bottom Lens Panels
- Mounts Over 4" Junction Box w/ Easy-hang Wall Mounting Plate (Included)
- Operating Temperature Range for EB (0° - 50°C)
- CSA Approved For Wet Location For Vertical Mounting
- LED Light Fixture
- Mounting Hardware Included

LINE DRAWING

LINE DRAWING NOT TO SCALE

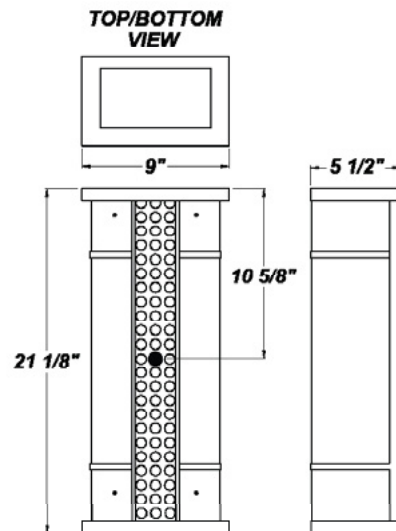


FINISHES


Antique Copper




Antique Silver




Bronze Mist




Matte Silver




Metallic Black




Sand




Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

ALLEGRO W RND LED

Architectural Outdoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|-----------------------|
| ALLW - Allegro W | L19.0-ZE700 - 30W @ 700mA 0-10V Dimming Driver L24.0-ZE875 - 33W @ 875mA 0-10V Dimming Driver L31.0-ZE1150 - 44W @ 1150mA 0-10V Dimming Driver | 120V 277V (50 / 60Hz) | Not Applicable |
| ORDER INFO | | | |
| ALLW | L19.0-ZE700 | 120V | Not Applicable |

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------|
| Not Applicable | AC - Antique Copper TB - Textured Black (Standard) AS - Antique Silver BT - Bronze Mist BZ - Textured Bronze MB - Metallic Black SM - Matte Silver TW - Textured White SN - Sand SW - Swedish Steel | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp | F - Fused TP - Tamper Resistant Screws |
| ORDER INFO | | | |
| Not Applicable | AC | 30K | F |

Example ^ (may not represent a manufacturable product)

| PROD | SOURCE | 30K SPECS | | | |
|-------------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|
| ALLW | L19.0 | <ul style="list-style-type: none"> • 30K - 3000K Color Temp • 2489 LED Source Lumens • 113 LED Source Lumens Per Watt | | | |
| | L24.0 | <ul style="list-style-type: none"> • 30K - 3000K Color Temp • 3180 LED Source Lumens • 106 LED Source Lumens Per Watt | | | |
| | L31.0 | <ul style="list-style-type: none"> • 30K - 3000K Color Temp • 4125 LED Source Lumens • 106 LED Source Lumens Per Watt | | | |

| REPLACEMENT PART | PART NO | NOTES |
|-----------------------------|---------|----------------------------------------------------------------------------------|
| White Acrylic Lens Assembly | 9801460 | Operating Temperature Range for EB (0° - 50°C) |
| | | Don't see the configuration you are looking for? Call us today at (513) 858-6004 |



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

ALLEGRO W RND LED

Architectural Outdoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|-----------------------|
| ALLW - Allegro W | L38.0-ZE1400 - 50W @ 1400mA 0-10V Dimming Driver L38.0-TE1400 - 60W @ 1400mA ELV Dimming Driver L36.0-ZE1100 - 36W @ 1100mA 0-10V Dimming Driver | 120V 277V (50 / 60Hz) | Not Applicable |
| ORDER INFO | | | |
| ALLW | L38.0-ZE1400 | 120V | Not Applicable |

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Not Applicable | AC - Antique Copper TB - Textured Black (Standard) AS - Antique Silver BT - Bronze Mist BZ - Textured Bronze MB - Metallic Black SM - Matte Silver TW - Textured White SN - Sand SW - Swedish Steel | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp | EB - Emergency Battery (L36.0 Only) F - Fused TP - Tamper Resistant Screws |
| ORDER INFO | | | |
| Not Applicable | AC | 30K | F |

Example ^ (may not represent a manufacturable product)

| PROD | SOURCE | 30K SPECS | | | |
|-------------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|
| ALLW | L36.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 5465 LED Source Lumens 151.8 LED Source Lumens per Watt | | | |
| | L38.3 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 5208 LED Source Lumens 109 LED Source Lumens Per Watt | | | |

| REPLACEMENT PART | PART NO | NOTES |
|-----------------------------|---------|----------------------------------------------------------------------------------|
| White Acrylic Lens Assembly | 9801460 | Operating Temperature Range for EB (0° - 50°C) |
| | | Don't see the configuration you are looking for? Call us today at (513) 858-6004 |



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.