

ROYAL EB LED

Architectural Outdoor




| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

FEATURES


- Aluminum Reflector
- Constant Current
- CSA Listed Wet Location
- Dimmable to 10% From 120V to 230V
- Emergency Battery Available
- LED Light Fixture
- Luminous White 75% DR Acrylic Diffuser
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- Steel Fascia w/ Textured Black Polyester Powder Coat Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish

LINE DRAWING

LINE DRAWING NOT TO SCALE

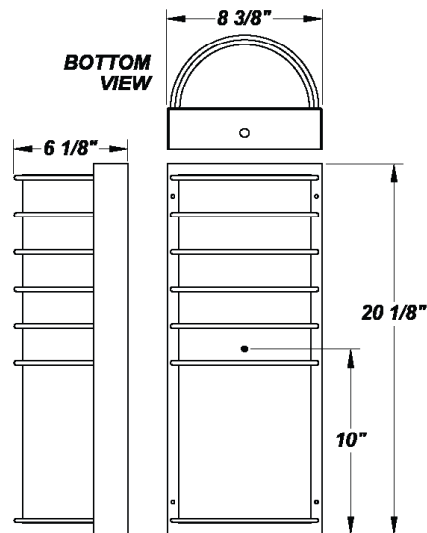

FINISHES

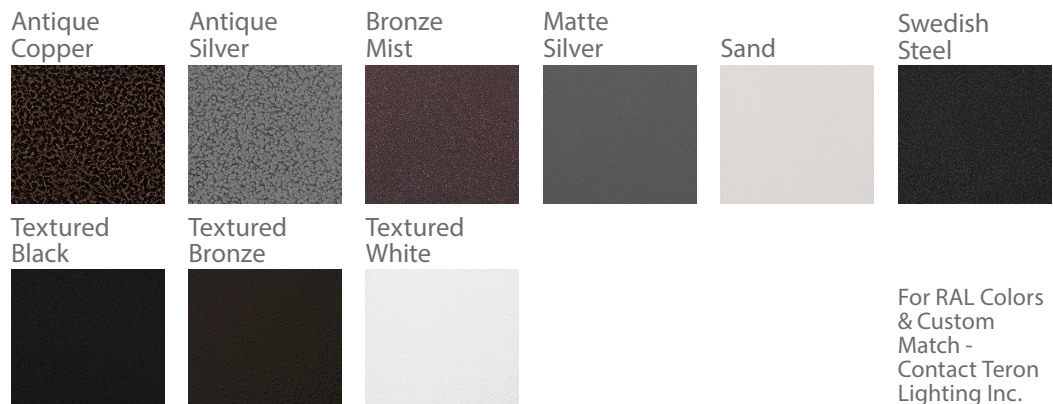

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

ROYAL EB LED

Architectural Outdoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|----------------|---|-----------------------------|----------------|
| RLB - Royal EB | L20.0-ZE700 - 20.0W @ 700mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L25.0-ZE875 - 25.0W @ 875mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L35.0-ZE1150 - 35.0W @ 1150mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) | 120V 277V (50 / 60Hz) | Not Applicable |
| ORDER INFO | | | |
| RLB | L20.0-ZE700 | 120V | Not Applicable |

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|----------------|---|--|--|
| Not Applicable | AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp | F - Fused TP - Tamper Resistant Screws EB - Integral Emergency Battery (Please Specify Voltage) SPD - Surge Protection Device |
| ORDER INFO | | | |
| Not Applicable | AC | 30K | F |

Example ^ (may not represent a manufacturable product)

| PROD | SOURCE | 30K SPECS | | | |
|------|--------|--|--|--|--|
| RLB | L20.0 | <ul style="list-style-type: none"> • 30K - 3000K Color Temp • 2309 LED Source Lumens • 115.5 LED Source Lumens Per Watt | | | |
| | L25.0 | <ul style="list-style-type: none"> • 30K - 3000K Color Temp • 2887 LED Source Lumens • 115.5 LED Source Lumens Per Watt | | | |
| | L35.0 | <ul style="list-style-type: none"> • 30K - 3000K Color Temp • 3926 LED Source Lumens • 112.2 LED Source Lumens Per Watt | | | |

| REPLACEMENT PART | PART NO | NOTES |
|---------------------------|---------|-------|
| White 75% DR Acrylic Lens | 3051160 | |

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.