## ROYAL VHT LED

Architectural Outdoor

/\I	CI	III	 .uı	aı	Ou	ιιu
a	2		 _			








### **FEATURES**

- · Aluminum Reflector
- · CSA Listed Wet Location
- · LED Light Fixture
- · Luminous White 75% DR Acrylic Diffuser
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- · Steel Fascia w/ Textured Black Polyester Powder Coat Finish
- · Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish



### LINE DRAWING

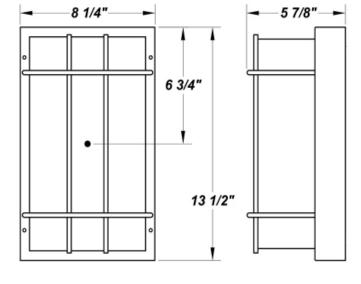



### **FINISHES**

Antique Copper Textured



Antique

Silver









Black



Textured **Bronze** 

Textured White

For RAL Colors & Custom Match -**Contact Teron** Lighting Inc.





TERONLIGHTING.COM

E: SALES@TERONLIGHT.COM

P: 513.858.6004



# ROYAL VHT LED

## Architectural Outdoor



PROJECT:		
TYPE:		
PO#:	QTY:	
COMMENTS:		

Fixture Core

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
RL - Royal ORDER INFO	L15.0-TE600 - 15.0W @ 600mA ELV Dimming Driver L18.0-TE700 - 18.0W @ 700mA ELV Dimming Driver L18.0-ZE700 - 18.0W @ 700mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	Not Applicable
RL	L15.0-TE600	120V	Not Applicable

Example ^ (may not represent a manufacturable product)

#### Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
VHT	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard)  BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp	F - Fused TP - Tamper Resistant Screws SPD – Surge Protection Device
ORDER INFO			
VHT	AC	30K	F

Example ^ (may not represent a manufacturable product)

PROD	SOURCE			
RL	L15.0	• 30K - 3000K Color Temp • 2048 LED Source Lumens • 136.5 LED Source Lumans Per Watt		
	L18.0	• 30K - 3000K Color Temp • 2390 LED Source Lumens • 132.8 LED Source Lumans Per Watt		

REPLACEMENT PART	PART NO	NOTES
White 75% DR Acrylic Lens	3051060	Don't see the configuration you are looking for? Call us today at (513) 858-6004





# ROYAL VHT LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

Fixture Core

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
RL - Royal	L30.0-ZE1050 - 30.0W @ 1050mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	Not Applicable
ORDER INFO			
RL	L15.0-TE600	120V	Not Applicable

#### Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
VHT	AC - Antique Copper BZ - Textured Bronze BT - Bronze Mist TW - Textured White SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard)	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp	F - Fused TP - Tamper Resistant Screws SPD – Surge Protection Device
ORDER INFO			
VHT	AC	30K	F

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS		
PROD RL	SOURCE L30.0	30K SPECS  • 30K - 3000K Color Temp  • 3585 LED Source Lumens  • 119.5 LED Source Lumans Per Watt		

REPLACEMENT PART	PART NO	NOTES
White 75% DR Acrylic Lens	3051060	Don't see the configuration you are looking for? Call us today at (513) 858-6004



