

BRIDGESTONE LED

Architectural Outdoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

FEATURES


- 100V - 277V
- ADA Compliant
- Aluminum Heat-Sink Plate
- CSA Listed Wet Location
- LED Light Fixture
- Luminous White Acrylic Panels
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- Solid Top and Bottom End Plates
- Steel Housing w/ Textured Black Polyester Powder Coat Finish
- Surge Protector
- Thermal Compensation Technology Ensures Longer LED Lifetime - Ideal For Fixtures Being Placed in Area w/ Fluctuating or Higher Ambient Temperatures
- Vandal Resistant

LINE DRAWING

LINE DRAWING NOT TO SCALE

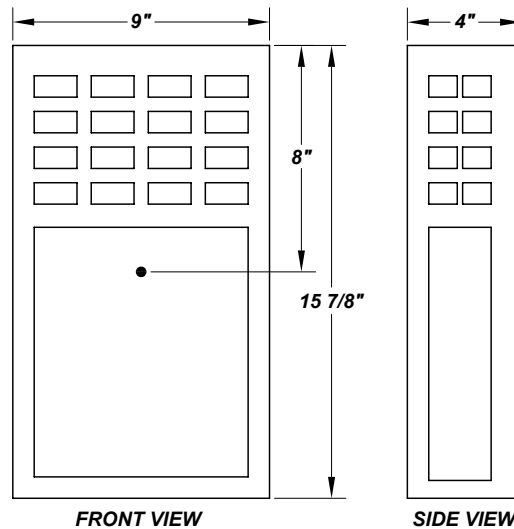

FINISHES

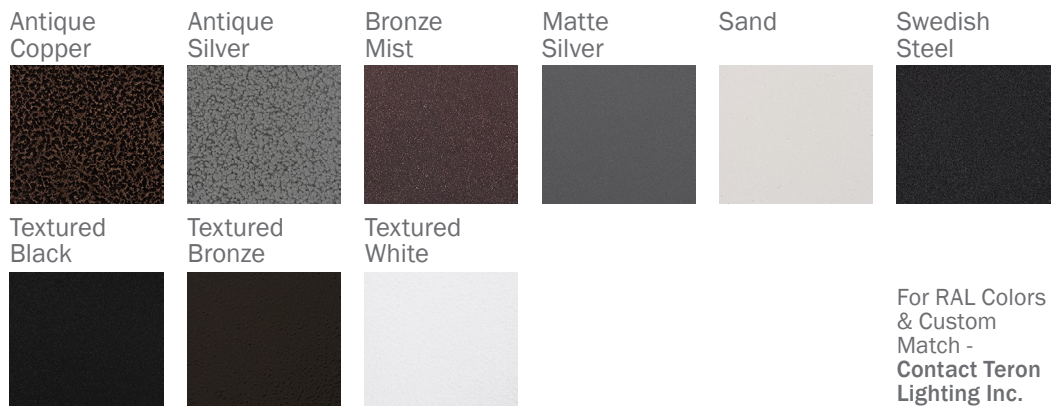

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

BRIDGESTONE LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
BGE - Bridgestone	L18.0-TE500 - 18.0W @ 500mA ELV Constant Current Dimming Driver L37.0-ZE1100 - 37.0W @ 1100mA 0-10V Dimming Driver (Dimmable 120V & 277V)	120V 277V	Not Applicable
ORDER INFO			
BGE	L18.0-TE500	120V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	F - Fused TP - Tamper Resistant Screws
ORDER INFO			
Not Applicable	AC	27K	F

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
BGE	L18.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 2484 LED Source Lumens 138 LED Source Lumens Per Watt 			
	L37.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 3835 LED Source Lumens 103.6 LED Source Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
White Acrylic Lens Panel Set	9800660	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.