ROYAL SQR LED

Architectural Outdoor

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

FEATURES

- Aluminum Reflector
- CSA Listed Wet Location
- LED Light Fixture
- Luminous White 75% DR Acrylic Diffuser
- Mounting Hardware Included
- Mounts Directly to 4” Junction Box (By Others)
- Steel Fascia w/ Textured Black Polyester Powder Coat Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish

LINE DRAWING

LINE DRAWING NOT TO SCALE

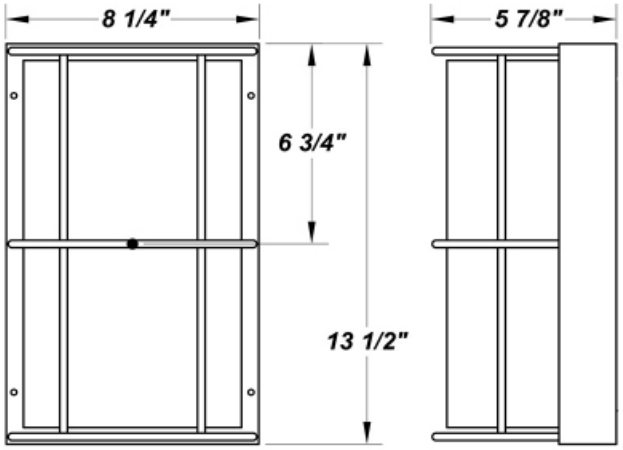

FINISHES

Antique Copper

Antique Silver



Bronze Mist

Matte Silver

Sand

Swedish Steel

Textured Black

Textured Bronze

Textured White

For RAL Colors & Custom Match - **Contact Teron Lighting Inc.**

TERON LIGHTING

TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 **F:** 513.858.6038
E: SALES@TERONLIGHT.COM

BUY AMERICAN SINCE 1979

SEND CUT-SHEET

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

ROYAL SQR LED

Architectural Outdoor

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

Fixture Core

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
RL - Royal	**L15.0-TE600** - 15.0W @ 600mA ELV Dimming Driver **L18.0-TE700** - 18.0W @ 700mA ELV Dimming Driver **L18.0-ZE700** - 18.0W @ 700mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	**120V** **277V** (50 / 60Hz)	**Not Applicable**
ORDER INFO			
RL	L15.0-TE600	120V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH		COLOR TEMP	OPTIONS
SQR	**AC** - Antique Copper **AS** - Antique Silver **BT** - Bronze Mist **SM** - Matte Silver **SN** - Sand **SW** - Swedish Steel **TB** - Textured Black (Standard)	**BZ** - Textured Bronze **TW** - Textured White	**30K** - 3000K Color Temp **35K** - 3500K Color Temp **40K** - 4000K Color Temp	**F** - Fused **TP** - Tamper Resistant Screws
ORDER INFO				
SQR	AC		30K	F

Example ^ (may not represent a manufacturable product)

PROD	SOURCE					
RL	L15.0	• 30K - 3000K Color Temp • 2048 LED Source Lumens • 136.5 LED Source Lumans Per Watt				
	L18.0	• 30K - 3000K Color Temp • 2390 LED Source Lumens • 132.8 LED Source Lumans Per Watt				

REPLACEMENT PART	PART NO	NOTES
White 75% DR Acrylic Lens	3051060	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004

TERON LIGHTING

TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 **F:** 513.858.6038
E: SALES@TERONLIGHT.COM

BUY AMERICAN SINCE 1979

SEND CUT-SHEET

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

ROYAL SQR LED

Architectural Outdoor

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

Fixture Core

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
RL - Royal	**L30.0-ZE1050** - 30.0W @ 1050mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	**120V** **277V** (50 / 60Hz)	**Not Applicable**
ORDER INFO			
RL	L15.0-TE600	120V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH		COLOR TEMP	OPTIONS
SQR	**AC** - Antique Copper **AS** - Antique Silver **BT** - Bronze Mist **SM** - Matte Silver **SN** - Sand **SW** - Swedish Steel **TB** - Textured Black (Standard)	**BZ** - Textured Bronze **TW** - Textured White	**30K** - 3000K Color Temp **35K** - 3500K Color Temp **40K** - 4000K Color Temp	**F** - Fused **TP** - Tamper Resistant Screws
ORDER INFO				
SQR	AC		30K	F

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS				
RL	L30.0	• 30K - 3000K Color Temp • 3585 LED Source Lumens • 119.5 LED Source Lumans Per Watt				

REPLACEMENT PART	PART NO	NOTES
White 75% DR Acrylic Lens	3051060	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004

TERON LIGHTING

TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 **F:** 513.858.6038
E: SALES@TERONLIGHT.COM

BUY AMERICAN SINCE 1979

SEND CUT-SHEET

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.