ROYAL TWB LED

Architectural Outdoor





FEATURES

- Aluminum Reflector
- CSA Listed Wet Location
- LED Light Fixture
- Luminous White 75% DR Acrylic Diffuser
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)

8 1/4"

Steel Fascia w/ Textured Black Polyester Powder Coat Finish

PROJECT: TYPE: PO#:

COMMENTS:


Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish

LINE DRAWING

LINE DRAWING NOT TO SCALE

5 7/8"



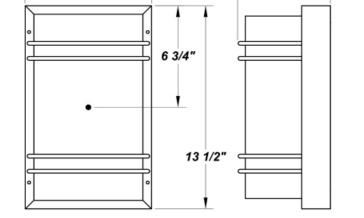





 TERONLIGHTING.COM

 33 DONALD DR, FAIRFIELD, OH 45014

 P: 513.858.6004

 F: 513.858.6038

 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice. 1

-





QTY:

ROYAL TWB LED

Architectural Outdoor

11 (SP LED

PROJECT: TYPE: PO#: QTY: COMMENTS:

Fixture Core					
PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER		
RL - Royal ORDER INFO	L15.0-TE600 - 15.0W @ 600mA ELV Dimming Driver L18.0-TE700 - 18.0W @ 700mA ELV Dimming Driver L18.0-ZE700 - 18.0W @ 700mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	Not Applicable		
RL	L15.0-TE600	120V	Not Applicable		

Aesthetics & Options

-	FINISH	COLOR TEMP	OPTIONS	
RIMFINISHCOLOR TEMPWBAC - Antique Copper AS - Antique SilverBZ - Textured Bronze30K - 3000K Color TempBT - Bronze Mist SM - Matte SilverTW - Textured White35K - 3500K Color TempSN - Sand SW - Swedish Steel TB - Textured Black (Standard)TW - Textured White40K - 4000K Color Temp		F - Fused TP - Tamper Resistant Screws		
	AC	ЗОК	F	
may not represent a	manufacturable product)			
SOURCE				
L15.0	 30K - 3000K Color Temp 2048 LED Source Lumens 136.5 LED Source Lumans Per Watt 30K - 3000K Color Temp 2390 LED Source Lumens 132.8 LED Source Lumans Per Watt 			
	SOURCE L15.0	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard) AC may not represent a manufacturable product) AC may not represent a manufacturable product) SOURCE L15.0 • 30K - 3000K Color Temp • 2048 LED Source Lumens • 136.5 LED Source Lumans Per Watt L18.0 • 30K - 3000K Color Temp • 2390 LED Source Lumens • 132.8 LED Source	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard) B2 - Textured Bronze TW - Textured Write 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp AC 30K AC 30K AC 30K AC 30K Item to trepresent a manufacturable product) 30K - 3000K Color Temp SOURCE • 30K - 3000K Color Temp L15.0 • 30K - 3000K Color Temp • 136.5 LED Source Lumans Per Watt • 30K - 3000K Color Temp • 136.5 LED Source Lumans Per Watt • 30K - 3000K Color Temp • 136.5 LED Source Lumans Per Watt • 30K - 3000K Color Temp • 132.8 LED Source • 132.8 LED Source	

REPLACEMENT PART	PART NO	NOTES
White 75% DR Acrylic Lens	3051060	Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM 33 DONALD DR, FAIRFIELD, OH 45014 P: 513.858.6004 F: 513.858.6038 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice. 2

ROYAL TWB LED

Architectural Outdoor

(SP LED

PROJECT:			
TYPE:			
PO#:	QTY:		
COMMENTS:			

Fixture Core			
PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
RL - Royal L30.0-ZE1050 - 30.0W @ 1050mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)		120V 277V (50 / 60Hz)	Not Applicable
ORDER INFO			
	145.0 75000	100/	NetApplicelle
RL	L15.0-TE600	120V	Not Applicable

Aesthetics & Options

TRIM		FINISH		COLOR TEMP		OPTIONS	
TWB AC - Antique C AS - Antique S BT - Bronze M SM - Matte Sil SN - Sand SW - Swedish		SW - Swedish Steel TB - Textured Black	BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp		F - Fused TP - Tamper Resistant Screws	
ORDER INFO							
TWB		AC		30K		F	
Example ^ (n	nay not represent a ma	anufacturable product)					
PROD	SOURCE	30K SPECS					
RL							
REPLACI	EMENT PART	PART NO NO	DTES				

REPLACEMENT PART	PARINO	NOTES
White 75% DR Acrylic Lens	3051060	Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM 33 DONALD DR, FAIRFIELD, OH 45014 P: 513.858.6004 F: 513.858.6038 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice. 3