

LANCER LED

Architectural Outdoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

FEATURES

- 120V - 277V
- ADA Compliant
- Constant Current Dimming Available
- CSA Listed For Wall Mount and Down Light Only
- Die-Cast Aluminum Housing w/ Textured Bronze Polyester Powder Coat Finish
- LED Light Fixture
- LED Light Source - 11W Nominal
- Mounts Directly to Junction Box
- Surge Protector

LINE DRAWING

LINE DRAWING NOT TO SCALE

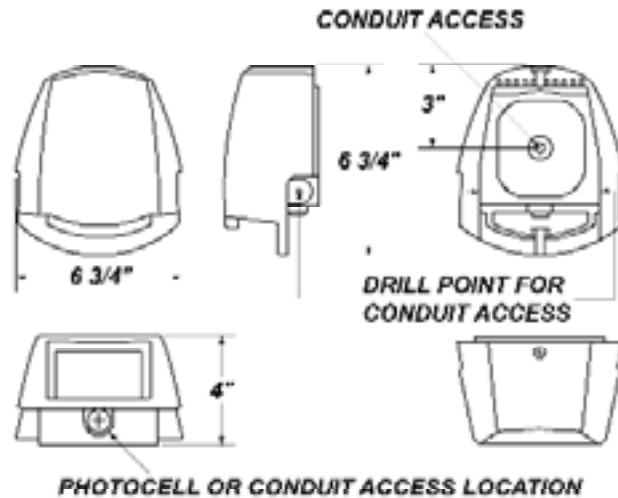

FINISHES

Antique Copper	Antique Silver	Bronze Mist	Matte Silver	Sand	Swedish Steel
Textured Black	Textured Bronze	Textured White			

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

LANCER LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
LCR - Lancer	L10.8-LE350 - (1) 10.8W @ 350mA Phase Dimming Driver (Dimmable @ 120V Only) L10.8-TE350 - (1) 10.8W @ 350mA ELV Dimming Driver L10.8-ZE350 - (1) 10.8W @ 350mA 0-10V Dimming Driver	120V 277V (50/60 Hz)	Not Applicable
ORDER INFO			
LCR	L10.8-LE350	120V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured	30K - 3000K Color Temp. 40K - 4000K Color Temp.	PCL120 - 120V Photocell PCL277 - 277V Photocell
ORDER INFO			
Not Applicable	AC	30K	PCL120

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS				
LCR	L10.8	<ul style="list-style-type: none"> 30K - 3000K Color Temp 1000 LED Source Lumens 90.1 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
Not Applicable	Not Applicable	*Photocell Located in the Bottom Conduit Access Point - See Fixture Schematic Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.