

TORINO 39" LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	



FEATURES

- ADA Compliant
- CSA Listed Damp Location For Wall And Ceiling Mount
- Mounts Directly to Wall or Ceiling
- Steel Housing & End Caps w/ Matte Silver Powder Coat Finish
- Steel Reflector Plate w/ Powder Coat Finish
- White Acrylic Lense



LINE DRAWING

LINE DRAWING NOT TO SCALE

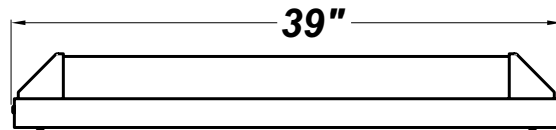

FINISHES

Antique Copper




Antique Silver




Bronze Mist




Matte Silver




Sand



Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

TORINO 39" LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
TN039 - Torino 39" LED	L27.2-ZE550 - 30W @ 800mA 4-Wire Dimming Driver (Dimmable 0 - 10V)	120-277V (50 / 60Hz)	ZE - 0 - 10V Dimming
ORDER INFO			
TN039 Example ^	L27.2-ZE550	120-277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
TWC - Twin Curves	WH - White AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	EB - Emergency Backup F - Fused JBC - Junction Box Cover TP - Tamper Resistant Screws TWC - Twin Curves Cover
ORDER INFO			
TWC Example ^	WH	30K	EB

PROD	SOURCE	30K SPECS
TN039	L27.2	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 2303 LED Delivered Lumens • 70.0 LED Delivered Lumens Per Watt

REPLACEMENT PART	PART NO	NOTES
White 3' Acrylic Diffuser	r 3032260	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.