Architectural Outdoor










## **FEATURES**


- Constant Voltage Modules (Excluding L218.1)
- CSA Listed Wet Location
- Die-Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Emergency Battery Available
- Frosted Tempered Glass Diffusers
- LED Light Fixture
- Mounts Direct to Flat Surface w/ Two #8 Wall Anchors (Not Included)
- Surge Protector
- Thermal Compensation Technology Ensures Longer LED Lifetime Ideal For Fixtures Being Placed in Area w/ Fluctuating or Higher Ambient Temperatures (Excluding L218.1)

## LINE DRAWING

INF DRAWING NOT TO SCALE

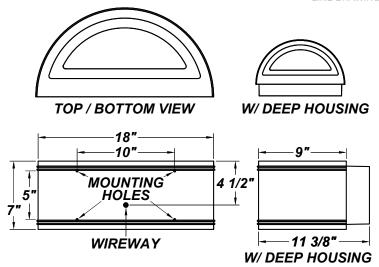

## **FINISHES**

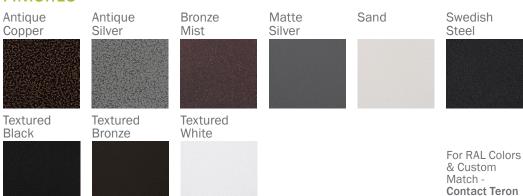





Lighting Inc.

Architectural Outdoor







Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
CRNW - Cornerstone W L112.3-12CV - 16W @ 12V Constant Voltage Non-Dimming Driver (UL/DL required)		120 - 277V	Not Applicable
	L212.3-12CV - 32W @ 12V Constant Voltage Non-Dimming Driver		
ORDER INFO	Bille		
CRNW	L112.3-12CV	120 - 277V	Not Applicable

### Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel  TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	DL - Downlight Only EB - Integral EM Battery (Downlight) (L112.3 Only) PCL - Photocell UL - Uplight Only (L112.3 Only)
ORDER INFO			
Not Applicable	AC	30K	DL

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS
CRNW	L112.3	30K - 3000K     Color Temp      1264 LED     Source Lumens      102.8 LED Source     Lumens Per Watt      1285 Delivered     LED Lumens      71.4 Delivered LED     Lumens Per Watt
	L212.3	<ul> <li>30K - 3000K Color Temp</li> <li>2528 LED Source Lumens</li> <li>78 LED Source Lumens Per Watt</li> <li>2355 Delivered LED Lumens</li> <li>70.4 Delivered Lumens Per Watt</li> </ul>

REPLACEMENT PART	PART NO	NOTES
Black Glass Lens	3702824	
Clear Glass Lens	37028	Don't see the configuration you are looking for?
Frosted Glass Lens	3702862	Call us today at (513) 858-6004



E: SALES@TERONLIGHT.COM

Architectural Outdoor







Fixture Core

PRODUCT CODE SOURCE/WATTAGE		DIMMING DRIVER
L124.5-12CV - 32W @ 12V Constant Voltage Non-Dimming Driver (UL/DL required) L224.5-12CV - 64W @ 12V Constant Voltage Non-Dimming Driver	120 - 277V	Not Applicable
Billion		
140454007	400 0771	Not Applicable
	L124.5-12CV - 32W @ 12V Constant Voltage Non-Dimming Driver (UL/DL required) L224.5-12CV - 64W @ 12V	L124.5-12CV - 32W @ 12V Constant Voltage Non-Dimming Driver (UL/DL required) L224.5-12CV - 64W @ 12V Constant Voltage Non-Dimming Driver

PROJECT: TYPE:

COMMENTS:

QTY:

PO#:

Example ^ (may not represent a manufacturable product)

### Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel  TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	DL - Downlight Only EB - Integral EM Battery (Downlight) (L124.5 Only) PCL - Photocell UL - Uplight Only (L124.5 Only)
ORDER INFO			
Not Applicable	AC	30K	DL

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS		
CRNW	L124.5	30K - 3000K     Color Temp     2528 LED     Source Lumens     103.2 LED Source     Lumens Per Watt     2442 Delivered LED     Source Lumens     76.3 Delivered     Lumens Per Watt		
	L224.5	30K - 3000K     Color Temp     5056 LED     Source Lumens     102.1 LED Source     Lumens Per Watt     4796 Delivered     LED Lumens     74.9 Delivered LED     Lumens Per Watt		

REPLACEMENT PART	PART NO	NOTES
Black Glass Lens	3702824	
Frosted Glass Lens	3702862	Don't see the configuration you are looking for? Call us today at (513) 858-6004



Architectural Outdoor







LED
$oldsymbol{-}$

rixture core			
PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
CRNW - Cornerstone W  L115.3-ZE12V - 20W @ 0-10V Dimming Driver Downlight L221.5-ZE12V - 56W @ 0-10V Dimming Drive		120 - 277V	Not Applicable
ORDER INFO			
CRNW	L115.3-ZE12V	120 - 277V	Not Applicable

PROJECT: TYPE:

COMMENTS:

QTY:

PO#:

### Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable ORDER INFO	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel  TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	DL - Downlight Only PCL - Photocell
Not Applicable	AC	30K	DL
	ent a manufacturable product)	0010	DE .

PROD	SOURCE	BOK SPECS
CRNW	L115.3	• 30K - 3000K Color Temp • 1580 LED Source Lumens • 103.3 LED Source Lumens Per Watt • 1541 Delivered LED Lumens • 73.4 Delivered LED Lumens
	L221.5	• 30K - 3000K Color Temp • 4424 LED Source Lumens • 102.9 LED Source Lumens Per Watt • 4057 Delivered LED Lumens • 72.4 Delivered LED Lumens Per Watt

REPLACEMENT PART	PART NO	NOTES
Black Glass Lens	3702824	
Frosted Glass Lens	3702862	Don't see the configuration you are looking for? Call us today at (513) 858-6004



P: 513.858.6004 F: 513.858.6038 E: SALES@TERONLIGHT.COM



Example ^ (may not represent a manufacturable product)

Architectural Outdoor







Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE SOURCE/WATTAGE		VOLTAGE	DIMMING DRIVER	
CRNW - Cornerstone W	<b>L218.1-ZE1100</b> - 42W @ 1100mA 0-10V Dimming Driver	120 - 277V	Not Applicable	
ORDER INFO				
CRNW	L218.1-ZE1100	120 - 277V	Not Applicable	

Example ^ (may not represent a manufacturable product)

### Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel  TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	DL - Downlight Only EB - Integral EM Battery (Downlight) PCL - Photocell
ORDER INFO			
Not Applicable	AC	30K	DL

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS		
CRNW	L218.1	30K - 3000K     Color Temp     5465 LED     Source Lumens     151 LED Source     Lumens Per Watt     4132 Delivered     LED Lumens     98.4 Delivered LED     Lumens per Watt		

REPLACEMENT PART	PARINO	NOTES
Black Glass Lens	3702824	
Frosted Glass Lens	3702862	Don't see the configuration you are looking for? Call us today at (513) 858-6004

