

BIRDIE POLY ROUND LED




White and Black
Finishes Shown

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- White or Black Polycarbonate Housing
- White or Black Polycarbonate Fascia
- Aluminum Back Pan w/ Powder Coat Finish
- Frosted White Polycarbonate Lens
- Ambient Operating Temperature -40° C (-40° F) to 40° C (105° F)
- Constant Current at 700 Milliamps
- UL Class 2 Driver - Power Factor >.90
- Estimated 50,000 Hours Life (L70)
- Thermal Protected LED Array
- Mounting Hardware Included
- UL Listed Wet Location
- Wall or Ceiling Mount

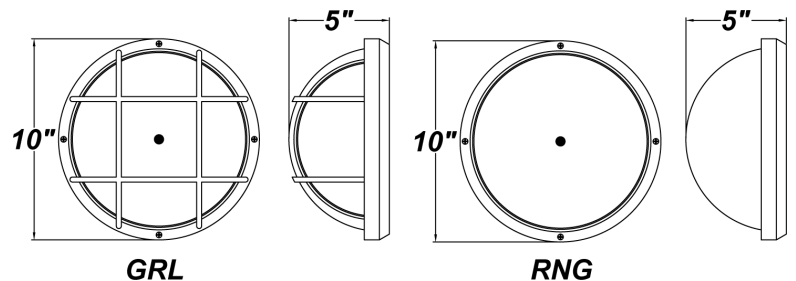

ORDERING INFORMATION

Example : (BER - L18.0 - 100 - 277V - GRL - BK - 40K)

BER					
PRODUCT	SOURCE/WATTAGE	VOLTAGE	FASCIA	FINISH	OPTIONS
Birdie Poly Round	L18.0 - (8) LED Array 50,000 Hours(L70) Please See "Options" Column For Specifications	100 - 277V (50 / 60Hz) Please See "Options" Column For Driver Specifications	GRL - Grill (Standard) RNG - Ring	WH - White Polycarbonate BK - Black Polycarbonate	18.0W LED ARRAY 40K - 4000K Color Temp. - 74 CRI Typ. - Constant Current at 700 Milliamps By Driver - 22W Input = 1824 LED Source Lumens - 82 LED Source Lumens Per Watt TP - Tamper Resistant Screws PCL120 - Photocell 120V PCL277 - Photocell 277V

REPLACEMENT PARTS PART NO.

White Polycarbonate Lens	3400760
Birdie Poly Round White GRL Fascia	5510602
Birdie Poly Round Black GRL Fascia	5510601
Birdie Poly Round White RNG Fascia	5510002
Birdie Poly Round Black RNG Fascia	5510001

NOTES

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

