


**GOLD CUP LG**



PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**FEATURES**

- Cast Aluminum Housing w/ Textured Polyester Bronze Powder Coat Finish
- Ribbed Borosilicate Glass Diffuser
- Fully Gasketed
- Stainless Steel Zinc-Coated Screws
- Mounts Direct to Flat Surface w/ Four #8 Wall Anchors (Not Included)
- Cast-In Template
- Lamps Included
- Integral EM Battery Available
- Electronic & HPS Wattages Are CSA Listed Wet Location For Wall Mount
- MH Wattages are CSA Listed Wet Location For Wall Mount With The Following Restrictions:
  - 150W & 250W May Include a Photocell And / or a 100W Quartz Lamp
  - 320W May Have a Photocell Only

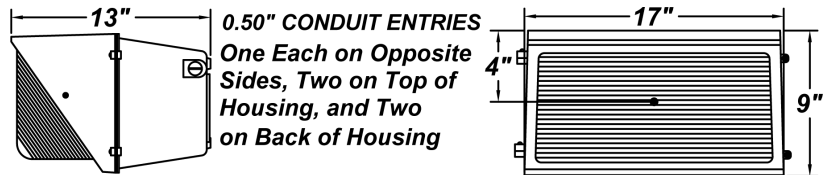

**ORDERING INFORMATION**

Example : (GPL320MH - MTH - SM)

Textured Bronze is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Gold Cup Lg	GPL150MH - 150W MH GPL250MH - 250W MH GPL320MH - 320W MH  GPL250 - 250W HPS  GPL232X - (2) 32W TBX GPL142X - (1) 42W TBX GPL242X - (2) 42W TBX	<u>METAL HALIDE (MH)</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) 347H - MT HPF (Wired 347V)  <u>HPS</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) (MT - Multi-Tap)  <u>FLUORESCENT (F)</u> 120E - 120V Electronic 277E - 277V Electronic	Not Applicable	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White  RAL Colors or Custom Match - Consult Factory	41K - 4100K Color Temp.* 35K - 3500K Color Temp.* 30K - 3000K Color Temp.* 27K - 2700K Color Temp.* (Standard) F - Fused PCL120 - Photocell 120V PCL277 - Photocell 277V DIM - Dimming Ballast * (Electronic Only) QRS - Quartz Restrike (DC/Bay - Lamp Included) QZS - Quartz Socket Only EBW / EBC - Integral Emergency Battery** (Electronic Only) EBR - Remote Mount Battery (Field Installed)** PST - Pulse Start Lamp & Ballast (MH Only) W2L - Wire 2 Lamps to Integral Emergency Battery MSP - Program Start Ballast (Recommended for Motion Sensor) ***

**REPLACEMENT PARTS**

**PART NO.**

Ribbed Borosilicate Glass Diffuser	37129
Internal Visor (Black Powder Coat Finish)	5300699

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

**ARRA 2009**



**BUY AMERICA ACT**



**NOTES**

**\*Fluorescent Only**

**\*\*Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

- EBW:** Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F
- EBC:** Bodine's B4CF1 (Electronic) - Temperature Rating (Ambient) -4° F - 131° F
- EBR:** Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

\*\*\* For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.