

OVERLAND MSI LED 36"

Architectural Indoor




| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |




FEATURES

- [Internal Motion Sensor](#)
- Steel Housing w/ White Powder Coat Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Steel End Caps w/ White Powder Coat Finish
- Clear Ribbed Acrylic Lens, Up / Down Lighting
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Convenience Outlet Available
- Pull Chain Available
- IES Files Available
- CSA Listed Damp Location, Including All Options Except For EB
- Emergency Battery Available
- LED Light Fixture

LINE DRAWING

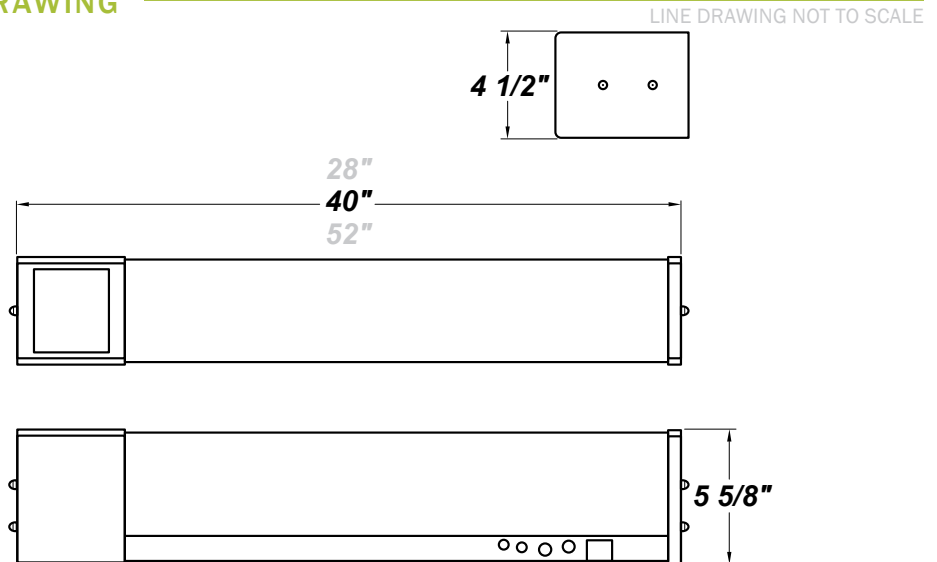

FINISHES

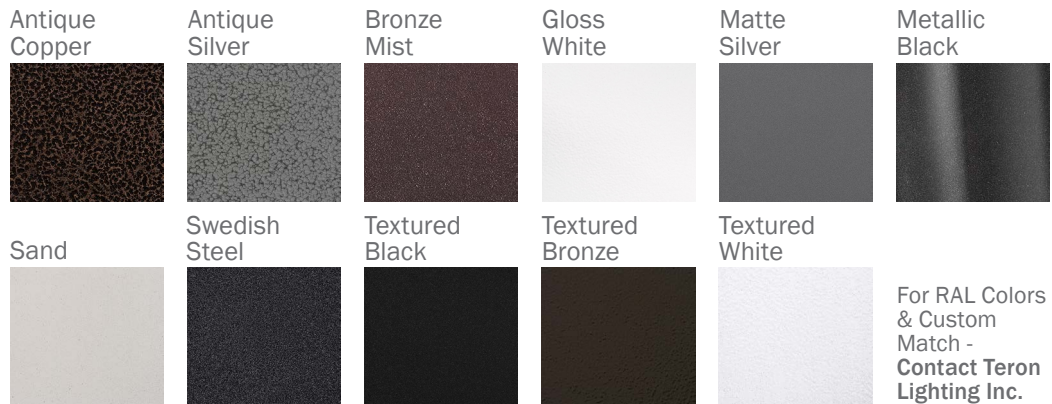

OVERLAND MSI LED 36"

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|-----------------------------|--|---|---|
| OLD36 - Overland 36" | L43.5-LE1280 - 43.5W @ 1280mA Triac Dimming Driver* L54.4-LE1600 - 54.4W @ 1600mA Triac Dimming Driver* L54.4-ZE1600 - 54.4W @ 1600mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) | 120V 277V (50 / 60Hz) | SD10 - 10/100% Bi-level Step Dimming SD25 - 25/100% Bi-level Step Dimming (120V / 277V Only) SD50 - 50/100% Bi-level Step Dimming (120V / 277V Only) |
| ORDER INFO | | | |
| OLD36 Example ^ | L43.5-LE1280 | 120V | SD50 |

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|------------------|---|---|--|
| MSI | AC - Antique Copper AS - Antique Silver BT - Bronze Mist BN - Brushed Nickel SM - Matte Silver MB - Metallic Black SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White WH - Gloss White (Standard) | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp | 2SW - Dual Switch w/ Pull Chain* BFL - Front Baffle For Up / Down Lighting CO - Convenience Outlet* DIV - Internal Divider For Up/Down Lighting (Recommended For Use With MSW + 25W Option) DL - Downlight Only EB - Integral Emergency Battery (Not Available For SD10)** F - Fused MSW - Multi Switch w/ Pull Chain (120V Only) (For Up, Down, and Up / Down Light)* NLT - 5.1W LED Night Light** |
| ORDER INFO | | | |
| MSI Example ^ | AC | 30K | 2SW |

| PROD | SOURCE | 30K SPECS | | | | |
|----------------|--------|--|--|--|--|--|
| OLD 36" | L43.5 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 5150 LED Source Lumens 125.6 LED Source Lumens Per Watt | | | | |
| | L54.4 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 7802 LED Source Lumens 123.8 LED Source Lumens Per Watt | | | | |

| REPLACEMENT PART | PART NO | NOTES |
|-------------------------------------|---------|---------------------------|
| 36" Clear Acrylic (3 Lamp) Diffuser | 30048 | * Option is for 120V Only |

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.