

VICEROY LG LED SLT MSE 24"

Architectural Indoor



| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |


FEATURES

- [External Motion Sensor](#)
- Steel Housing with Matte Silver Powder Coat Finish
- Matte White Acrylic Inner & Clear Acrylic Outer Lens Assembly
- 0-10V and Trailing Edge (ELV) Dimming Compatible Options Available
- Over-Voltage, Over-Current, and Short-Circuit Protection with Auto Recovery
- Mounts Directly to Surface with Two Wall Anchors (Not Included) Over a 2" Junction Box (Not Included)
- Knockouts on Back Accept Standard Electrical Fittings (By Others)
- Lighting Facts, IES, & Title 24 Labeling / Certification
- ADA Compliant
- CSA Listed Damp Location For Wall or Ceiling Mount
- LED Light Fixture




LINE DRAWING

LINE DRAWING NOT TO SCALE

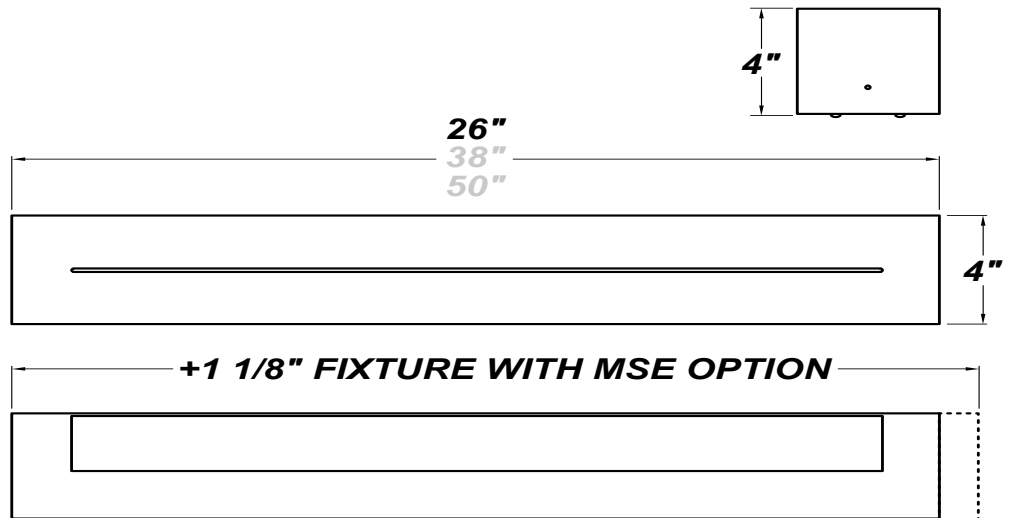

FINISHES

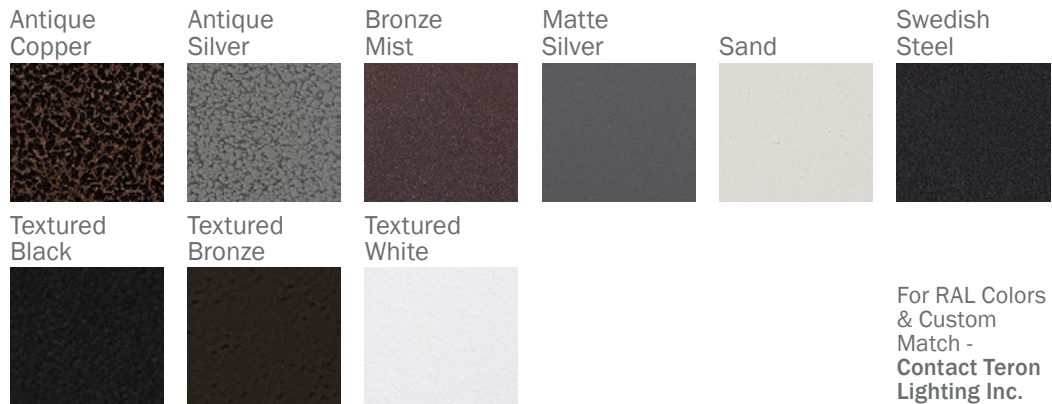

VICEROY LG LED SLT MSE 24"

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING BALLAST |
|--------------------------------|---|---|---|
| VCYL24 - Viceroy LG 24" | L20.1-ZE550 - 22W @ 550mA Constant Current Dimming Electronic Driver (Dimmable 0-10V) L20.1-TE550 - 30W @ 550mA Constant Current ELV Dimming Electronic Driver | 120V 277V 347V (50 / 60Hz) | SDxx - Bi-Level Step Dimming from 10-70% in increments of 10% (replace xx in ordering code with requested dim to dimming percentage) |
| ORDER INFO | | | |
| VCYL24 | L20.1-ZE550 | 120V | SD50 |

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|--|--|--|---|
| SLT MSE - Wattstopper FS-205 IR Motion Sensor | AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White | 27K - 2700K Color Temp. 30K - 3000K Color Temp. 35K - 3500K Color Temp. 40K - 4000K Color Temp. 51K - 5100K Color Temp. | JBC - 4" x 4" Junction Box Cover (Mounts to Fixture, To be Retro-fitted Over an Existing Junction Box) EB - BSL310 Emergency Driver TP - Tamper Resistant Screws F - Fused |
| ORDER INFO | | | |
| HRS MSE | AC | 35K | JBC |

Example ^ (may not represent a manufacturable product)

| PROD | SOURCE | 27K SPECS | 30K SPECS | 35K SPECS | 40K SPECS | 50K SPECS |
|---------------|-------------|---|---|---|---|--|
| VCYL24 | L20.1-ZE550 | <ul style="list-style-type: none"> • 27K - 2700K Color Temp. Nominal • 1735 Estimated Delivered Lumens • 24.26 Estimated Delivered Lumens Per Watt | <ul style="list-style-type: none"> • 30K - 3000K Color Temp. Nominal • 1767 Delivered Lumens • 23.43 Delivered Lumens Per Watt | <ul style="list-style-type: none"> • 35K - 3500K Color Temp. Nominal • 1799 Estimated Delivered Lumens • 24.26 Estimated Delivered Lumens Per Watt | <ul style="list-style-type: none"> • 40K - 4000K Color Temp. Nominal • 1863 Estimated Delivered Lumens • 24.26 Estimated Delivered Lumens Per Watt | <ul style="list-style-type: none"> • 50K - 5000K Color Temp. Nominal • 1928 Estimated Delivered Lumens • 24.2 Estimated Delivered Lumens Per Watt |

| REPLACEMENT PART | PART NO | NOTES |
|------------------|---------|--|
| 2' Lens Assembly | 38096 | *Don't see the configuration you are looking for? Call us today at (513) 858-6004 |



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.