


FALDO W LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

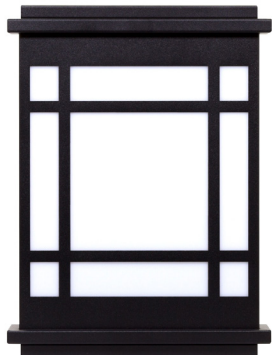


FEATURES

- Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Aluminum Heat-Sink Plate
- Aluminum Solid Top and Bottom End Plates
- Luminous White Acrylic Panels
- 100V - 277V
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- ADA Compliant
- CSA Listed Wet Location
- Emergency Battery Available
- LED Light Fixture

LINE DRAWING

LINE DRAWING NOT TO SCALE

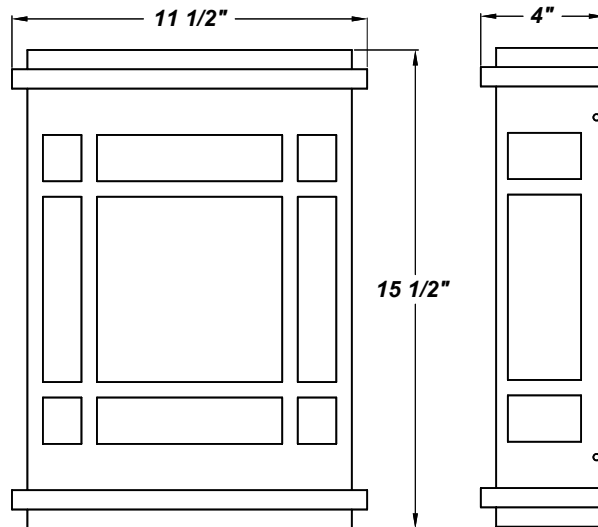

FINISHES

Antique Copper	Antique Silver	Bronze Mist	Matte Silver	Metallic Black	Sand
Swedish Steel	Textured Black	Textured Bronze	Textured White		

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

FALDO W LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
FLW - Faldo W	L19.0-ZE600 - 19W @ 600mA 4-Wire 0-10V Dimming Driver L37.0-ZE1100 - 37W @ 1100mA 4-Wire 0-10V Dimming Driver	120V 277V	Not Applicable
ORDER INFO			
FLW	L19.0-ZE600	120V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist MB - Metallic Black SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White	27K - 2700K Color Temp 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	EBC - Iota ILB-CP12-B Integral 12W LED Driver (Available For L19.0 Only) (Please Specify Voltage) EBW - Bodine BSL26 - Up To 5.1W Emergency Illumination w/ LEDs (Available For L37.0 Only) (Please Specify Voltage) F - Fused TP - Tamper-Proof Screws WAL - White Acrylic (Standard)
ORDER INFO			
Not Applicable	AC	27K	EBC

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS				
Faldo W	L19.0	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 2980 LED Source Lumens 156.8 LED Source Lumens Per Watt 				
	L37.0	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 3835 LED Source Lumens 103.6 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
White Acrylic Lens Panel Set	9800660	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.