

PROJECT :
TYPE :
ORDERING # :
COMMENTS :



CADDY LG LED

FEATURES



- Die-Cast Aluminum Housing w/ Textured Bronze Polyester Powder Coat Finish
- Tempered Clear Glass Diffuser
- Surge Protector
- Fully Gasketed
- Mounts Direct to Flat Surface w/Three #8 Wall Anchors (Not Included)
- CSA Listed Wet Location For Wall Mount (Down Light Only)
- L70 Life Time For 50,000hr

0.50" Conduit Entries
One Each on Right Side,
Top, Back, And Bottom
of Housing

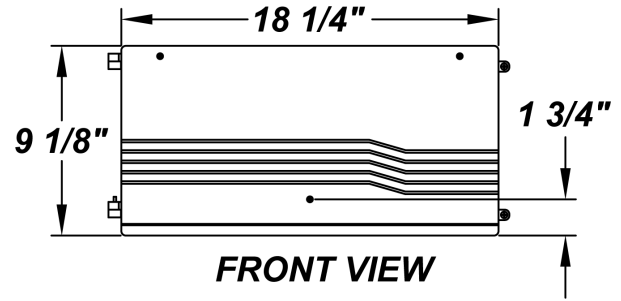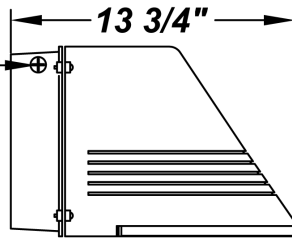

ORDERING INFORMATION

Example : (CDL - L48.0 - 120-277V - CGL - SW - 50K) Textured Bronze is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Caddy LG	L48.0 - 48W LED Module	120 - 277V Please See "Options" Column For Driver Specifications	CGL - Clear Glass Lens (Standard)	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White MB - Metallic Black RAL Colors or Custom Match - Consult Factory	30K - 3000K Color Temperature 40K - 4000K Color Temperature 50K - 5000K Color Temperature MS - Motion Sensor (Can be Used w/ "SDIM" Option) PCL120 - Photozell 120V PCL277 - Photozell 277V DIM - Dimmable Driver (0 - 10V) SDIM - Step-Dimmable Driver (Dimmable to 25% & 50%) PDIM - Pulse Width Dimmable Driver (0 - 10V) F - Fused EBW - Warm Weather Emergency Driver EBC - Cold Weather Emergency Driver Please Note: 120V or 277V Must Be Specified When Ordering The EB Option

SOURCE/WATTAGE	30K SPECIFICATIONS
L48.0 - (1) 48W LED Board - Constant Current at 1050mA by Driver - 58W Input	LED Specifications - 90 LEDs Per Strip - SW50Bin, Color Temp = 3000K Nominal - 80 CRI typ. (75 CRI min) - 4971 LED Source Lumens - 86 LED Source Lumens Per Watt

REPLACEMENT PARTS	PART NO.
Clear Glass Diffuser	37050

NOTES

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

