

CHAPARRAL LG LED

Architectural Outdoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

FEATURES

- 6 Year Limited Warranty
- Cast Aluminum Housing with Polyester Powder Coat Finish
- Center-to-Edge Uniformity and Enhanced Beam Control
- Integrated 4kv Surge Protection
- Integrated Cowl
- IP66 Rated - Dust and Waterproof
- LED Light Fixture
- Reinforced Knuckle Design
- Single LED Chip-on-Board Light Source
- Three-Step Binning For Tight Color Consistency
- UL Listed Wet Location
- Vandal Resistant
- Water Draining Front End

LINE DRAWING

LINE DRAWING NOT TO SCALE

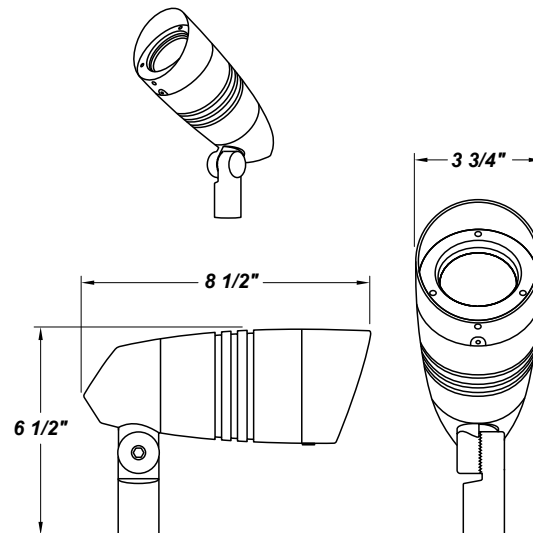

FINISHES

Textured
Architectural
Bronze

Textured
Black



CHAPARRAL LG LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
CHL - Chaparral	L14.3 - 14.3W LED Fixture L21.0 - 21.0W LED Fixture	120 - 277V	Not Applicable
ORDER INFO			
CHL	L14.3	120	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
SPOT - 15° Beam Spread NFL - 33° Beam Spread WFL - 55° Beam Spread	BZ - Textured Architectural Bronze TB - Textured Black	30K - 3000K Color Temp. 40K - 4000K Color Temp.	BKTJB - Junction Box Mounting Bracket (Specify Finish - BZ or TB) PRPT - 2.25" ID PVC Power Post w/ Stabilizer SMF - Surface Mounting Flange (Specify Finish - BZ or TB) ST12 - 12" Stem (Specify - BZ or TB) ST18 - 18" Stem (Specify - BZ or TB) ST24 - 24" Stem (Specify - BZ or TB)
ORDER INFO			
SPOT	BZ	30K	BKTJB

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS	40K SPECS			
CHL	L14.3	<ul style="list-style-type: none"> 30K - 3000K Color Temp 1200 Delivered Lumens 84 Delivered Lumens Per Watt 	<ul style="list-style-type: none"> 40K - 4000K Color Temp 1200 Delivered Lumens 84 Delivered Lumens Per Watt 			
	L21.1	<ul style="list-style-type: none"> 30K - 3000K Color Temp 1800 Delivered Lumens 86 Delivered Lumens Per Watt 	<ul style="list-style-type: none"> 40K - 4000K Color Temp 1800 Delivered Lumens 86 Delivered Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
Not Applicable	Not Applicable	Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.