


# HUNTINGTON LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

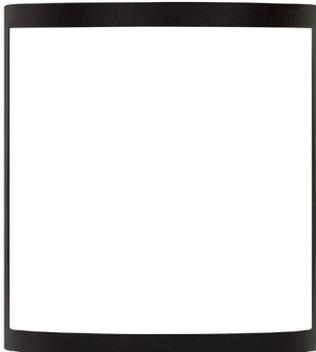


## FEATURES

- ADA Compliant
- Constant Current at 350 Milliamps
- CSA Listed Dry Location For Wall Mounting
- Dimmable to <5%
- Dimmable With Either Triac or Electronic Dimmers
- Estimated 50,000 Hours Life (L70)
- LED Light Fixture
- Matte White Acrylic Diffuser
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- One 12.5W LED Driver Per 12.5W Module
- Over-Current, Over-Voltage, and Short Circuit Protection
- Steel Housing w/ Textured Black Powder Coat Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Steel Perforated Top and Bottom Covers w/ Textured Black Powder Coat Finish
- UL Class 2 Driver - Power Factor >.90

## LINE DRAWING

LINE DRAWING NOT TO SCALE

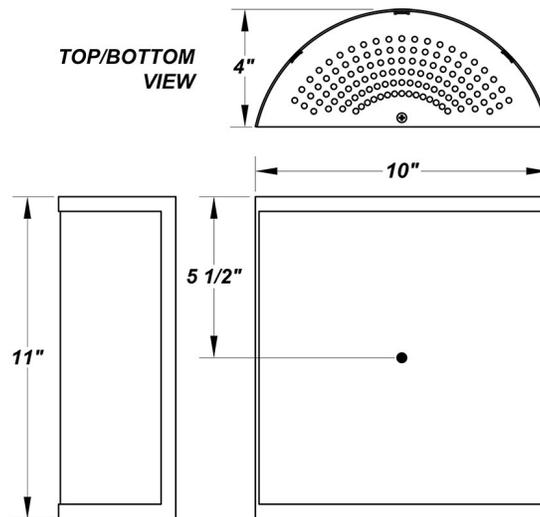

## FINISHES

Antique Copper	Antique Silver	Bronze Mist	Matte Silver	Sand	Swedish Steel
Textured Black	Textured Bronze	Textured White			

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

# HUNTINGTON LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
HT - Huntington	<b>L12.5</b> - LT350 (1) 12.5W (40) LED Module <b>L25.0</b> - LT700 (2) 12.5W (40) LED Modules	<b>120V</b> <b>277V</b> (50 / 60Hz)	<b>LT350/LT500 Drivers Are Only Dimmable at 120V</b>
ORDER INFO			
HT Example ^	L12.5-LT350	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
<b>Not Applicable</b>	<b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>SM</b> - Matte Silver <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>TB</b> - Textured Black (Standard)	<b>BZ</b> - Textured Bronze <b>TW</b> - Textured White  <b>27K</b> - 2700K Color Temp <b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>F</b> - Fused <b>PWL</b> - PWL - White Acrylic w/ White Mylar Perf
ORDER INFO			
Not Applicable Example ^	AC	27K	F

PROD	SOURCE	30K SPECS			
HT	L12.5	<ul style="list-style-type: none"> <li>80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>976 LED Delivered Lumens</li> <li>78 LED Delivered Lumens Per Watt</li> </ul>			
	L25.0	<ul style="list-style-type: none"> <li>80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>1896 LED Delivered Lumens</li> <li>75.8 LED Delivered Lumens Per Watt</li> </ul>			

REPLACEMENT PART	PART NO	NOTES
White Acrylic Lens	3018760	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

# HUNTINGTON LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
HT - Huntington	<b>L12.5</b> - ZE350 (1) 12.5W (40) LED Module <b>L25.0</b> - ZE700 (2) 12.5W (40) LED Modules	<b>120-277V</b> (50 / 60Hz)	<b>ZE350/ZE500 Drivers Are Dimmable at 120-277V</b>
ORDER INFO			
HT Example ^	L12.5-ZE350	120-277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
<b>Not Applicable</b>	<b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>SM</b> - Matte Silver <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>TB</b> - Textured Black (Standard)	<b>BZ</b> - Textured Bronze <b>TW</b> - Textured White  <b>27K</b> - 2700K Color Temp <b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>F</b> - Fused <b>PWL</b> - PWL - White Acrylic w/ White Mylar Perf
ORDER INFO			
Not Applicable Example ^	AC	27K	F

PROD	SOURCE	30K SPECS				
HT	L12.5	<ul style="list-style-type: none"> <li>80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>976 LED Delivered Lumens</li> <li>78 LED Delivered Lumens Per Watt</li> </ul>				
	L25.0	<ul style="list-style-type: none"> <li>80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>1896 LED Delivered Lumens</li> <li>75.8 LED Delivered Lumens Per Watt</li> </ul>				

REPLACEMENT PART	PART NO	NOTES
White Acrylic Lens	3018760	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.