


HAZELTINE LARGE LED



PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Aluminum Mounting Pan & Trim w/ Hi-Reflectance Powder Coat Finish
- Sand-Blasted White Polycarbonate Diffuser
- Luminous White Polycarbonate Top Diffuser For "Halo" Effect
- Twist & Lock System - No Exposed Hardware
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- CSA Listed Damp Location

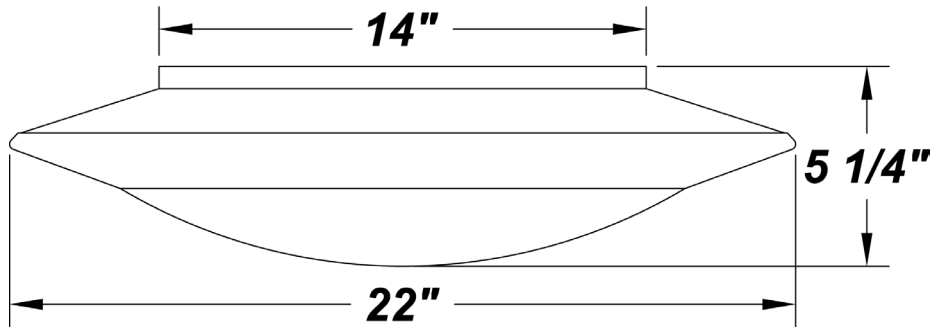

ORDERING INFORMATION

Example : (HEL - L21.0 - 120-277V - ZE700 - 40K)

White is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DRIVER OPTIONS	DIFFUSER	FINISH	OPTIONS
Hazeltine Large	L16.3 - (60) LED Array L21.0 - (60) LED Array	120 - 277V (50 / 60Hz)	ZE560 - Line Voltage 4-Wire Dimming Driver (For L16.3 Only) (Dimmable 0 - 10V) ZE700 - Line Voltage 4-Wire Dimming Driver (For L21.0 Only) (Dimmable 0 - 10V)	Not Applicable	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White MB - Metallic Black RAL Colors or Custom Match - Consult Factory	27K - 2700K Color Temperature 30K - 3000K Color Temperature 35K - 3500K Color Temperature 40K - 4000K Color Temperature F - Fused

SOURCE/WATTAGE	30K SPECIFICATIONS
L16.3 - (60) LED Array - Constant Current @560mA - 20.4 Input Watts 50,000 Hours(L70)	16.3W LED ARRAY 30K - 3000K Color Temp. - 80 CRI Typ. - 2110 LED Source Lumens - 103 LED Source Lumens Per Watt
L21.0 - (60) LED Array - Constant Current @560mA - 20.4 Input Watts 50,000 Hours(L70)	21.0W LED ARRAY 30K - 3000K Color Temp. - 80 CRI Typ. - 2640 LED Source Lumens - 105 LED Source Lumens Per Watt

NOTES

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

REPLACEMENT PARTS **PART NO.**

White Polycarbonate Diffuser	3019460
White Polycarbonate Top (Halo) Diffuser	3023460

