

ADAMS W LED

Architectural Outdoor




PROJECT:

TYPE:

PO#:

QTY:

COMMENTS:

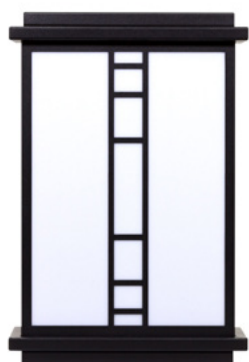


FEATURES

- Steel Housing w/ Textured Black Polyester Powder Coat Finish
- Aluminum Heat-Sink Plate
- Solid Top and Bottom End Plates
- Luminous White Acrylic Panels
- Thermal Compensation Technology Ensures Longer LED Lifetime - Ideal For Fixtures Being Placed in Area w/ Fluctuating or Higher Ambient Temperatures
- Surge Protector
- Mounts Directly to 4" Junction Box (By Others)
- ADA Compliant
- CSA Listed Wet Location
- Emergency Battery Available
- LED Light Fixture
- Mounting Hardware Included
- Vandal Resistant


LINE DRAWING

LINE DRAWING NOT TO SCALE

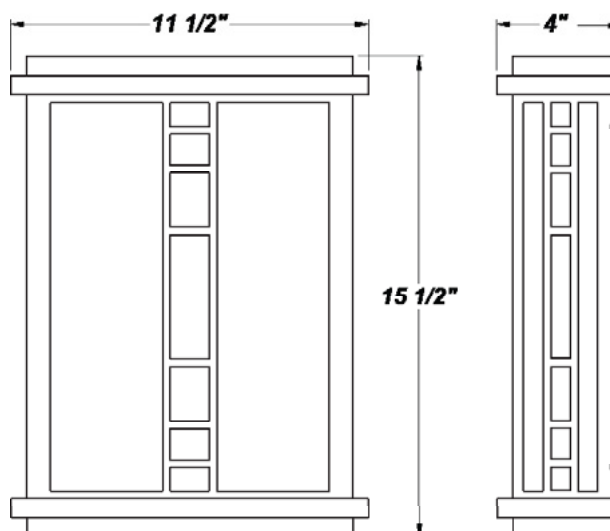


FINISHES


Antique Copper




Antique Silver




Bronze Mist




Matte Silver




Sand




Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

ADAMS W LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
ADW - Adams W	L19.0-ZE600 - 19W @ 600mA 4-Wire 0-10V Dimming Driver L37.0-ZE1100 - 37W @ 1100mA 4-Wire 0-10V Dimming Driver	120V 277V (120 - 230V Dimmable)	Not Applicable
ORDER INFO			
ADW	L19.0-ZE600	120V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White	27K - 2700K Color Temp 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	EB - 5.1W Integral EM Battery F - Fused TP - Tamper Resistant Screws WAL - White Acrylic
ORDER INFO			
Not Applicable	AC	27K	EB

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS				
	L19.0	<ul style="list-style-type: none">• 80 CRI Typ.• 30K - 3000K Color Temp• 2980 LED Source Lumens• 156.8 LED Source Lumens Per Watt				
	L37.0	<ul style="list-style-type: none">• 80 CRI Typ.• 30K - 3000K Color Temp• 3835 LED Source Lumens• 103.6 LED Source Lumens Per Watt				

REPLACEMENT PART	PART NO	NOTES
White Acrylic Lens Panel Set	9800660	Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.