


ESQUIRE W LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




FEATURES

- 100V - 277V
- ADA Compliant
- Aluminum Heat-Sink Plate
- CSA Listed Wet Location
- Emergency Battery Available
- LED Light Fixture
- Luminous White Acrylic Panels
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- Solid Top and Bottom End Plates
- Steel Housing w/ Textured Black Polyester Powder Coat Finish

LINE DRAWING

LINE DRAWING NOT TO SCALE

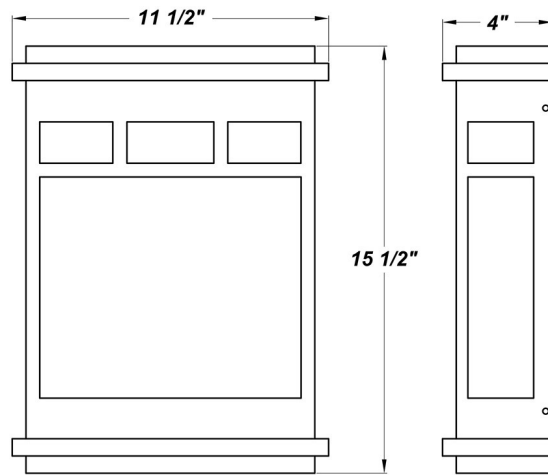

FINISHES

Antique Copper




Antique Silver




Bronze Mist




Matte Silver




Metallic Black




Sand



Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

ESQUIRE W LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
ESQW - Esquire W	L19.0-ZE600 - 19W @ 600mA 4-Wire 0-10V Dimming Driver L37.0-ZE1100 - 37W @ 1100mA 4-Wire 0-10V Dimming Driver	120V - 277V	Not Applicable
ORDER INFO			
ESQW	L19.0-ZE600	120V - 277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver MB - Metallic Black SN - Sand SW - Swedish Steel TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	EBC - Iota ILB-CP12-B Integral 12W LED Driver (Available For L19.0 Only) (Please Specify Voltage) EBW - Bodine BSL26 - Up To 5.1W Emergency Illumination w/ LEDs (Available For L37.0 Only) (Please Specify Voltage) F - Fused TP - Tamper-Proof Screws
ORDER INFO			
Not Applicable	AC	27K	EBC

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
ESQW	L19.0	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 2980 LED Source Lumens 156.8 LED Source Lumens Per Watt 			
	L37.0	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 3835 LED Source Lumens 103.6 LED Source Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
White Acrylic Lens Panel Set	9800660	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.