

OASIS LED 24"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- Steel Housing w/ White Powder Coat Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Steel End Caps w/ White Powder Coat Finish
- Clear Acrylic Lens w/ Ribbed Sides and Prismatic Front
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- 0-10V and Leading Edge / Phase Dimming Compatible Options Available
- IES Files Available
- CSA Listed Damp Location
- Emergency Battery Available
- LED Light Fixture



LINE DRAWING

LINE DRAWING NOT TO SCALE

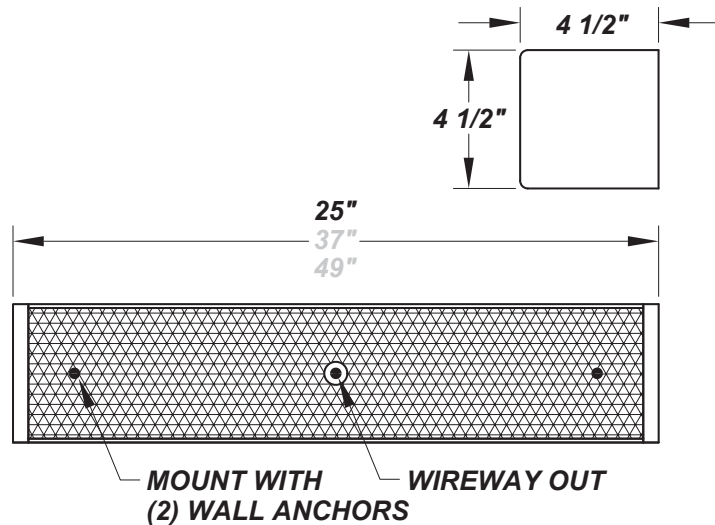

FINISHES

Antique Copper	Antique Silver	Bronze Mist	Gloss White	Matte Silver	Metallic Black
Sand	Swedish Steel	Textured Black	Textured Bronze	Textured White	

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

OASIS LED 24"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
OAS24 - Oasis 24"	L34.7-LE950 - 40W @ 950mA Triac Dimming Driver L38.3-ZE1050 - 42W @ 1050mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120 - 277V 347V (50 / 60Hz)	Not Applicable
ORDER INFO			
PN12 Example ^	L34.7-LE950	120 - 277V	SD10

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist BN - Brushed Nickel SM - Matte Silver MB - Metallic Black SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White WH - Gloss White (Standard)	27K - 2700K Color Temp 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	2SW - 2-Position Switch w/ Pull Chain* BFL - Front Baffle For Up / Down Lighting CH - Chrome End Caps CO - Convenience Outlet* EB - Integral Emergency Battery** F - Fused** MSW - Multi-Level Switch w/ Pull Chain (120V Only) (For Multi-Directional Lighting)* NLT - 5.1W LED Night Light** SP - Surge Protector
ORDER INFO			
MSE Example ^	AC	27K	2SW

PROD	SOURCE	30K SPECS				
OAS 24"	L34.7	<ul style="list-style-type: none"> 30K - 3000K Color Temp 5150 LED Source Lumens 125.6 LED Source Lumens Per Watt 				
	L38.3	<ul style="list-style-type: none"> 30K - 3000K Color Temp 4080 LED Source Lumens 90.8 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
24" Clear Acrylic Diffuser	30909	* Option is for 120V Only ** Option is for 120 or 277V Only Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.