

SYMPHONY SQR LED

Architectural Indoor




| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

FEATURES

- ADA Compliant
- Aluminum Fascia
- Aluminum Mounting Plate Mounts to Wall Surface (Centered Over and Attached to J-box)
- Arm & Mount Pan w/ Standard Matte Silver Powder Coat Finish
- CSA Listed Dry Location For Wall Mount
- Dimmable @ 120V and 277V
- Indirect Lighting Source
- LED Light Fixture
- LED Light Source
- Mounting Hardware Included
- Surge Protector - (Optional)
- UL Class 2 Driver

LINE DRAWING

LINE DRAWING NOT TO SCALE

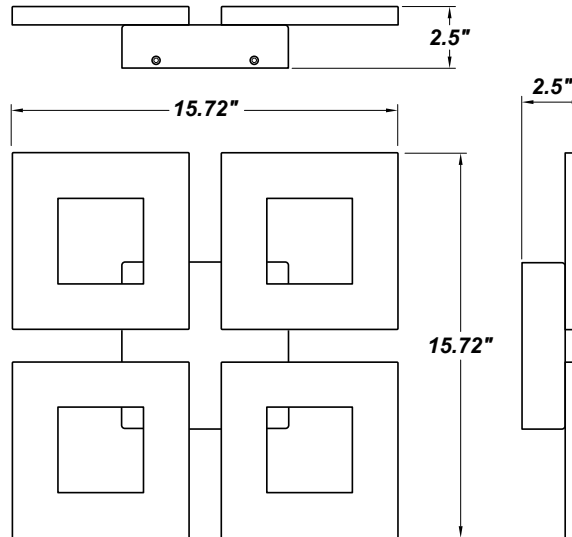

FINISHES

| | | | | | |
|----------------|-----------------|----------------|--------------|------|---------------|
| Antique Copper | Antique Silver | Bronze Mist | Matte Silver | Sand | Swedish Steel |
| | | | | | |
| Textured Black | Textured Bronze | Textured White | | | |
| | | | | | |

For RAL Colors & Custom Match - Contact Teron Lighting Inc.



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

SYMPHONY SQR LED

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|--------------------|---|--------------------------------|-----------------------|
| SQR - Symphony SQR | L16.4-ZE500 - 16.4W Strips @ 500mA 4-Wire Dimming Driver (Dimmable 0-10V) L16.0-LT500 - 16.0W Strips @ 500mA 2-Wire Dimming Driver (Leading & Trailing Edge) | 120-277V (50 / 60Hz) | Not Applicable |
| ORDER INFO | | | |
| SQR | L16.4-ZE500 | 120-277V | Not Applicable |
| Example ^ | | | |

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|-----------------------|---|--|-------------------------------------|
| Not Applicable | AC - Antique Copper AS - Antique Silver SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp | S - Surge Protector 120/277V |
| ORDER INFO | | | |
| Not Applicable | AC | 27K | S |
| Example ^ | | | |

| PROD | SOURCE | 30K SPECS | | | |
|------|--------|--|--|--|--|
| SQR | L16.4 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 2378 LED Source Lumens 145 LED Source Lumens Per Watt | | | |

| REPLACEMENT PART | PART NO | NOTES |
|------------------|---------|--|
| | | Don't see the configuration you are looking for? Call us today at (513) 858-6004 |



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.