

# ALANTE BFP LED 12"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


## FEATURES

- Steel Housing w/ Brushed Nickel Powder Coat Finish
- Inner Shade: White Acrylic
- Outer Shade: Off-White Decorative Fiber
- Bottom Shade: White Acrylic
- ETL/cETL Listed Dry Location
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- LED Light Fixture



## LINE DRAWING

LINE DRAWING NOT TO SCALE

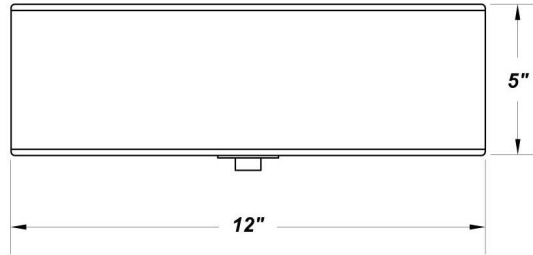

## FINISHES

Brushed Nickel



# ALANTE BFP LED 12"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
AE12 - Alante 12"	L18.0-LT500 - (1) 18W @ 500mA Triac Dimming Driver	120V (50/60 Hz)	Triac Dimming (120V Only)
ORDER INFO			
AE12 Example ^	L18.0-LT500	120V	Triac Dimming

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	BN - Brushed Nickel (Standard)	30K - 3000K Color Temp. 40K - 4000K Color Temp.	Not Applicable
ORDER INFO			
Not Applicable Example ^	BN	30K	Not Applicable

PROD	SOURCE	30K SPECS				
AE12	L18.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>1800 LED Source Lumens</li> <li>100 LED Source Lumens Per Watt</li> <li>80 CRI</li> </ul>				

REPLACEMENT PART	PART NO	NOTES
		L70 >35,000 hrs Minimum Starting Temperature = -20 Degrees C



TERONLIGHTING.COM  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.