

ALANTE PD BFP LED 12"

Architectural Indoor



| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |


FEATURES

- Steel Housing w/ Brushed Nickel Powder Coat Finish
- White Acrylic Diffuser
- ETL/cETL Listed Dry Location
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- LED Light Fixture



LINE DRAWING

LINE DRAWING NOT TO SCALE

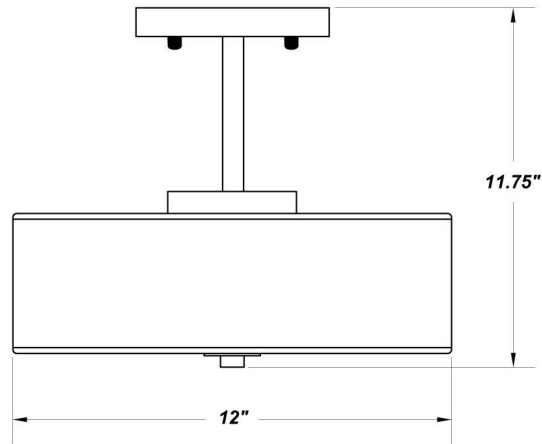

FINISHES

Brushed Nickel



ALANTE PD BFP LED 12"

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|--|--|---------------------------|----------------------------------|
| AE12PD - Alante Pendant 12" (With 6" Stem) | L18.0-LT500 - (1) 18W @ 500mA Triac Dimming Driver | 120V (50/60 Hz) | Triac Dimming (120V Only) |
| ORDER INFO | | | |
| AE12PD Example ^ | L18.0-LT500 | 120V | Triac Dimming |

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|-----------------------------|---|--|-----------------------|
| Not Applicable | BN - Brushed Nickel (Standard) | 30K - 3000K Color Temp. 40K - 4000K Color Temp. | Not Applicable |
| ORDER INFO | | | |
| Not Applicable Example ^ | BN | 30K | Not Applicable |

| PROD | SOURCE | 30K SPECS | | | | |
|---------------|--------|--|--|--|--|--|
| AE12PD | L18.0 | <ul style="list-style-type: none"> • 30K - 3000K Color Temp • 1800 LED Source Lumens • 100 LED Source Lumens Per Watt • 80 CRI | | | | |

| REPLACEMENT PART | PART NO | NOTES |
|------------------|---------|---|
| | | L70 >35,000 hrs Minimum Starting Temperature = -20 Degrees C |



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.