

ASCOTT BFP LED 14"

Architectural Outdoor



| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |


FEATURES

- Conduit Entry Points
- ETL/cETL Listed Wet Location
- Energy Star
- Mounts Directly to Surface w/ Two Wall Anchors
- Injection Molded Polycarbonate Housing w/ White Finish
- LED Light Fixture
- Luminous White Polycarbonate Diffuser




LINE DRAWING

LINE DRAWING NOT TO SCALE

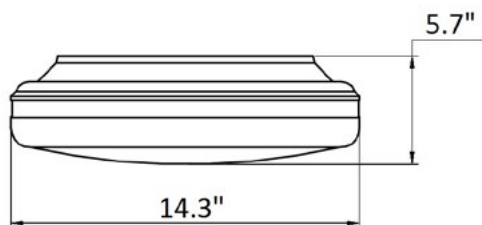

FINISHES

White



ASCOTT BFP LED 14"

Architectural Outdoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|-------------------|-------------------------------|-------------|----------------|
| AT14 - Ascott 14" | L23.0-700 - (1) 23.0W @ 700mA | 120V - 277V | Not Applicable |
| ORDER INFO | | | |
| AT14 Example ^ | L23.0-700 | 120/277V | Not Applicable |

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|-----------------------------|-----------------------|--|----------------|
| Not Applicable | WH - White (Standard) | 30K - 3000K Color Temp. 35K - 3500K Color Temp. 40K - 4000K Color Temp. 50K - 5000K Color Temp. | Not Applicable |
| ORDER INFO | | | |
| Not Applicable Example ^ | WH | 40K | Not Applicable |

| PROD | SOURCE | 40K SPECS | | | | |
|------|--------|---|--|--|--|--|
| AT14 | L23.0 | <ul style="list-style-type: none"> 40K - 4000K Color Temp 2200 LED Source Lumens 95.7 LED Source Lumens Per Watt | | | | |

| REPLACEMENT PART | PART NO | NOTES |
|------------------|---------|---|
| | | L70 >35,000 hrs Minimum Starting Temperature = -20 Degrees C |



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.