

ASCOTT BFP LED 18"

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- Conduit Entry Points
- ETL/cETL Listed Wet Location
- Energy Star
- Mounts Directly to Surface w/ Two Wall Anchors
- Injection Molded Polycarbonate Housing w/ White Finish
- LED Light Fixture
- Luminous White Polycarbonate Diffuser




LINE DRAWING

LINE DRAWING NOT TO SCALE

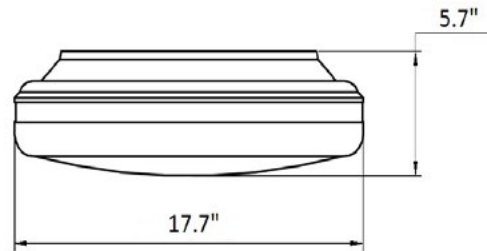

FINISHES

White



ASCOTT BFP LED 18"

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
AT18 - Ascott 18"	L34.0-1050- (1) 34.0W @ 1050mA	120V - 277V	Not Applicable
ORDER INFO			
AT18 Example ^	L34.0-1050	120/277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	WH - White (Standard)	30K - 3000K Color Temp. 35K - 3500K Color Temp. 40K - 4000K Color Temp. 50K - 5000K Color Temp.	Not Applicable
ORDER INFO			
Not Applicable Example ^	WH	40K	Not Applicable

PROD	SOURCE	40K SPECS				
AT18	L34.0	<ul style="list-style-type: none"> Color Temp 3300 LED Source Lumens 97.1 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
		L70 >35,000 hrs Minimum Starting Temperature = -20 Degrees C



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.