

ASCOTT BFP LED 18"

Architectural Outdoor



PROJECT:

TYPE:

PO#:

QTY:

COMMENTS:


FEATURES

- 2 Side Conduit Entry Points
- ETL/cETL Listed Wet Location for Wall or Ceiling
- Energy Star
- Mounts Directly to Surface w/ Two Wall Anchors
- Injection Molded Polycarbonate Housing w/ White Finish
- LED Light Fixture
- Luminous White Polycarbonate Diffuser




LINE DRAWING

LINE DRAWING NOT TO SCALE

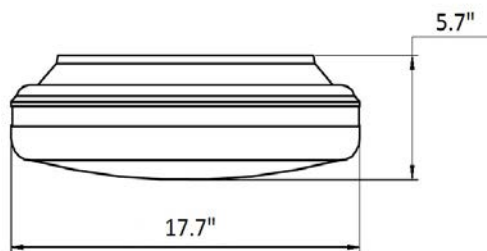

FINISHES

White



ASCOTT BFP LED 18"

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
AT18 - Ascott 18"	L34.0-1050- (1) 34.0W @ 1050mA	120V - 277V	Not Applicable
ORDER INFO			
AT18 Example ^	L34.0-1050	120/277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	WH - White (Standard)	40K - 4000K Color Temp. 50K - 5000K Color Temp.	Not Applicable
ORDER INFO			
Not Applicable Example ^	WH	40K	Not Applicable

PROD	SOURCE	40K SPECS				
AT18	L34.0	<ul style="list-style-type: none">Color Temp3300 LED Source Lumens97.1 LED Source Lumens Per Watt				

REPLACEMENT PART	PART NO	NOTES
		L70 >35,000 hrs Minimum Starting Temperature = -20 Degrees C