


CONCERTO DL LED

Architectural Indoor



| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

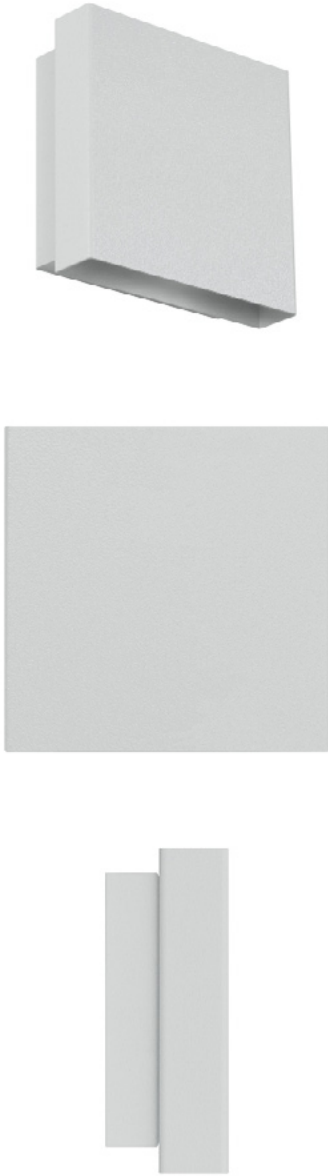


FEATURES


- ADA Compliant
- Aluminum Fixture w/ Textured White Powder Coat Finish
- Aluminum Mounting Plate Mounts to Wall Surface (Centered Over And Attached to J-Box)
- CSA Listed Dry Location For Wall Mount, Dimmable @ 120V
- Dimmable to 2%
- Down Light
- Estimated Lumen Depreciation (TM-21) 69% of Initial Lumens (L70) @ 80,000 hours
- LEDs Are Lensed And Not Exposed
- LED Light Fixture
- Single Directional Light Up Or Down
- Solid Top Cover

LINE DRAWING

LINE DRAWING NOT TO SCALE

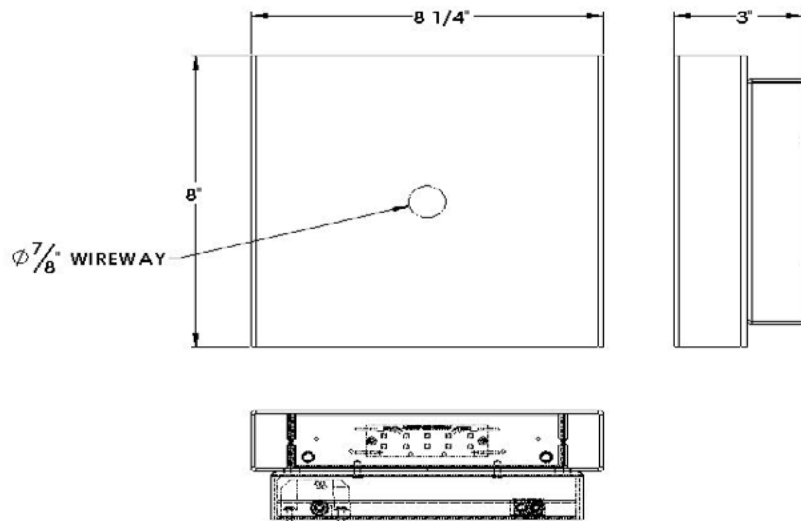

FINISHES

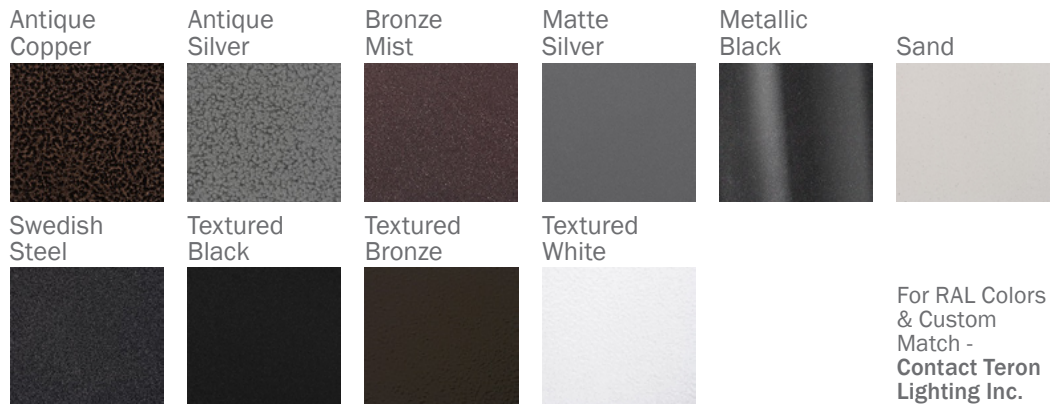

CONCERTO DL LED

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|------------------|--|-----------------------------|--------------------|
| CTO - Concerto | L10.8-LT350 - 10.8W @350mA ELV Dimming Driver | 120V 277V (50 / 60Hz) | See Source/Wattage |
| ORDER INFO | | | |
| CTO Example ^ | L10.8-LT350 | 120V | See Source/Wattage |

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|-----------------|--|---|----------------------------|
| DL | AC - Antique Copper AS - Antique Silver BT - Bronze Mist MB - Metallic Black SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black | BZ - Textured Bronze TW - Textured White (Standard) 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp | S - Surge Protector |
| ORDER INFO | | | |
| DL Example ^ | TW | 30K | S |

| PROD | SOURCE | 30K SPECS | | | |
|--------|--------|---|--|--|--|
| CTO DL | L10.8 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 672.5 Source Lumens on The Bottom 62.3 Delivered LED Lumens Per Watt on The Bottom | | | |

| REPLACEMENT PART | PART NO | NOTES |
|------------------|---------|---|
| | | Darker Finishes May Reduce The LED Output. Textured White And Matte Silver Are Recommended for Maximum Light Output. |
| | | Don't see the configuration you are looking for? Call us today at (513) 858-6004 |



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.