

KATONA BFP LED 24"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	



FEATURES

- Die-Formed Cold-Rolled Steel Housing
- Anodized Aluminum Reflector
- Acrylic Lens
- Mounts Directly to 4" Junction Box (By Others)
- Energy Star
- ETL/cETL Listed Dry Location
- LED Light Fixture
- Mounting Hardware Included



LINE DRAWING

LINE DRAWING NOT TO SCALE

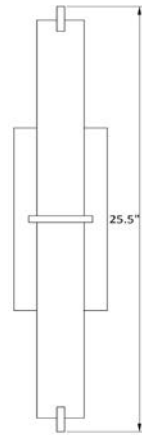

FINISHES

Brushed
Nickel



KATONA BFP LED 24"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
KA24 - Katona 24"	L19.0-LT500 - (1) 19W @ 500mA Triac Dimming Driver	120V (50/60 Hz)	Triac Dimming (120V Only)
ORDER INFO			
KA24 Example ^	L19.0-LT500	120V	Triac Dimming

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	BN - Brushed Nickel (Standard)	30K - 3000K Color Temp. 40K - 4000K Color Temp.	Not Applicable
ORDER INFO			
Not Applicable Example ^	BN	30K	Not Applicable

PROD	SOURCE	30K SPECS				
KA24	L19.0	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 1540 LED Source Lumens • 90.6 LED Source Lumens Per Watt 	<ul style="list-style-type: none"> • 40K - 4000K Color Temp • 1256 LED Source Lumens • 90.4 LED Source Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
		KA24 L70 >35,000 hrs Minimum Starting Temperature = -20 Degrees C



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.