

# LANIER S BFP LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




## FEATURES

- Die-Formed Cold-Rolled Steel Housing
- Anodized Aluminum Reflector
- Glass Lens
- Mounts Directly to 4" Junction Box (By Others)
- ETL/cETL Listed for Dry Location
- LED Light Fixture
- Mounting Hardware Included

## LINE DRAWING

LINE DRAWING NOT TO SCALE

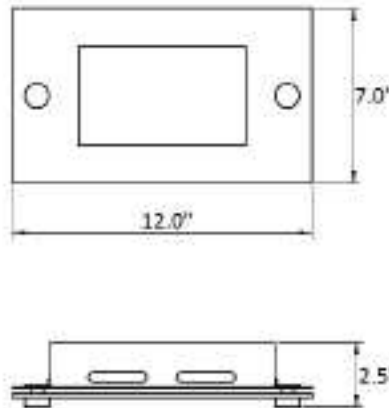

## FINISHES

Brushed  
Nickel



# LANIER S BFP LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
LNS - Lanier S	L15.0-LT500 - 15.0W @ 500mA Constant Current	120V (50/60 Hz)	Not Applicable
ORDER INFO			
LNS	L15.0-LT500	120V	Not Applicable
Example ^			

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	BN - Brushed Nickel (Standard)	30K - 3000K Color Temp.	Not Applicable
ORDER INFO			
Not Applicable	BN	30K	Not Applicable
Example ^			

PROD	SOURCE	30K SPECS				
LNS	L15.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>1256 LED Source Lumens</li> <li>66.1 Lumens Per Watt</li> </ul>				

REPLACEMENT PART	PART NO	NOTES



TERONLIGHTING.COM  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM

SEND CUT-SHEET

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.