

MESA BFP LED 12"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- Die-Formed Cold-Rolled Steel Housing
- Anodized Aluminum Reflector
- Fabric Lens with Acrylic Bottom
- Mounts Directly to 4" Junction Box (By Others)
- Energy Star
- Damp Location
- ETL/cETL Listed
- LED Light Fixture



LINE DRAWING

LINE DRAWING NOT TO SCALE

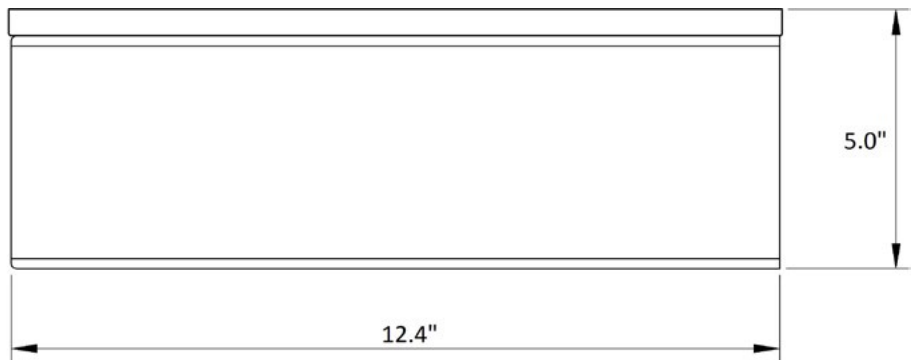

FINISHES

Brushed
Nickel



MESA BFP LED 12"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
MSA12 - Mesa 12"	L18.0-LT500 - (1) 18W @ 500mA Triac Dimming Driver	120V (50/60 Hz)	Triac Dimming (120V Only)
ORDER INFO			
MSA12 Example ^	L18.0-LT500	120V	Triac Dimming

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	BN - Brushed Nickel (Standard)	30K - 3000K Color Temp. 40K - 4000K Color Temp.	FM - Flush Mount PM - Pendant Mount (6" Stem)
ORDER INFO			
Not Applicable Example ^	BN	30K	FM

PROD	SOURCE	30K SPECS				
MSA12	L18.0	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 1249 LED Source Lumens • 100 LED Source Lumens Per Watt • 80 CRI 				

REPLACEMENT PART	PART NO	NOTES
		L70 >35,000 hrs Minimum Starting Temperature = -20 Degrees C



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.