NIKE BFP LED 14"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


Line Co



- Die-Formed Cold-Rolled Steel Housing
- Anodized Aluminum Reflector
- White Acrylic Lens
- Mounts Directly to 4" Junction Box (By Others)
- ETL/cETL Listed Dry Location
- LED Light Fixture
- Mounting Hardware Included

LINE DRAWING

LINE DRAWING NOT TO SCALE

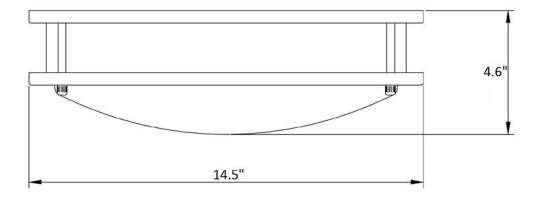

FINISHES

Brushed Nickel



NIKE BFP LED 14"

Architectural Indoor

(II)	LED	N.
-------------	-----	----

TYPE:	
PO#:	QTY:
COMMENTS:	

Fixture Core

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NEB14 - Nike BFP LED 14"	L24.0-700 - (1) 24W @ 700mA	120V - 277V	Not Applicable
ORDER INFO			
NEB14	L24.0-700	120/277V	Not Applicable

PROJECT:

Aesthetics & Options

TRIM Not	FINISH BN - Brushed	COLOR TEMP 30K - 3000K Color Temp.	OPTIONS FM - Flush Mount	
Applicable	Nickel (Standard)	40K - 4000K Color Temp.	PM - Pendant Mout (6" Stem)	
ORDER INFO				
Not Applicable	BN	30K	FM	

Example ^

1	PROD	SOURCE	30K SPECS		
	PROD NEB14	L24	OK SPECS OUT To Specify the specific that specify the specific that specific that specific the specific th		

REPLACEMENT PART	PART NO	NOTES

